

Broad Inhibition of Transmission Frequency in Multilayered Dielectric One Dimensional Photonic Crystal Nanostructure

Vinod Chacko¹⁾, Sonia Bansal¹⁾ and Aurangzeb Khurram Hafiz²⁾

¹⁾Department of Applied Science and Humanities, YMCAUST, Haryana, India

²⁾Centre for Nanoscience and Nanotechnology, Jamia Millia Islamia, New Delhi, India

Email: vinodchackophy@gmail.com

Abstract - We report the omnidirectional reflection (ODR) in one dimensional photonic crystal (PC) structure consisting of alternate layers of Cryolite (Na_3AlF_6) as material of low refractive index and Germanium (Ge) as material of high refractive index. The effects of the thickness of layers and incidence angles on the spectral reflectance have been investigated using transfer matrix method (TMM). The proposed structure gives broad inhibition of transmission frequencies within a wide range of wavelengths in the visible-near IR region (600 nm- 850 nm) which can be tuned according to the design parameters. We observe that cryolite based photonic crystal structure can be used as a good candidate for wavelength filter or broad reflector in the near infrared spectrum which is very useful in many imaging sensors in the field of optical technology.

Keywords — cryolite, photonics, photonic crystals, omnidirectional reflector, transfer matrix method, cryolite based 1DPC, 1DPC

Submission: October 17, 2018

Corrected: December 1, 2018

Accepted: March 18, 2019

Doi: 10.12777/ijse.13.1.7-11

[How to cite this article: Chacko, V, Bansal, S and Hafiz, A. K. (2019). Broad Inhibition of Transmission Frequency in Multilayered Dielectric One Dimensional Photonic Crystal Nanostructure, *International Journal of Science and Engineering*, 13(1),7-11. Doi: 10.12777/ijse.13.1.7-11]

I. INTRODUCTION

Photonic Crystals (PCs) are optical nanostructures with a periodic modulation in the refractive index on the length scale comparable to optical wavelength. They are characterized by electromagnetic forbidden bands or photonic band gaps (PBGs). In other words, the propagation of electromagnetic waves, whose frequencies lie within the PBGs, is prohibited. This unique feature of the photonic crystal structures controls dramatically the flow of light within the structure and can lead to many potential applications in field of photonics [1-7]. The propagation of photons in PCs is analogous to propagation of electrons in semiconductor crystals where the effect of periodic refractive index in PCs is same as the effect of periodic potential function on propagation of electrons in semiconductors.

In these structures the refractive index is a periodic function in space and if the refractive index is periodic only in one dimension then the structure is called one dimensional photonic crystal (1DPC), if it is periodic in two dimensions and three dimensions then the structure is known as two dimensional photonic crystal (2DPC) and three dimensional photonic crystal (3DPC) respectively. PCs that work in microwave and far-infrared regions are relatively easier to fabricate. However, PCs that work in visible and the infrared

(IR) regions, especially, 3DPC are difficult to fabricate because of their small lattice constants, which have to be comparable to the wavelength. Therefore, 1D PCs, which can easily be produced by the thin film deposition techniques, are preferable for use in the visible and IR regions [8-14]. The simplest 1DPC is an alternating stack of two different mediums having reflection properties which find them used in variety of applications including high efficiency mirrors, Fabry Perot cavities, optical filters and feedback lasers [15-22]. In recent time optical reflectors are one of the most widely used optical devices and a great deal of work has been done on the omnidirectional reflectors [23-26]. In metallic reflector [27], light can be reflected over a wide range of frequencies for arbitrary incident angles however, at higher frequencies considerable amount of power is lost due to the absorption. In comparison to metallic reflectors a cryolite based multilayered nanostructures have high reflectivity in a certain range of frequencies, but the reflectivity is very sensitive to the incident angles. The range of reflected frequency of these reflectors can be enhanced by the appropriate selection of the material parameters and layer thickness [28-31].

The space-time dispersion of cryolite conductivity was analyzed and the optical properties of cryolite were studied

[32]. Thus, cryolite has unique optical properties which make it useful in designing of opto-electronic devices. In the present study, we have neglected field absorption / attenuation as the constituent materials have negligible absorption coefficients in the wavelength range of interest. We observe that cryolite based photonic crystal structure can be used as a good candidate for wavelength filter or broad reflector in the near infrared spectrum which is very useful in many imaging sensors in the field of optical technology. The paper is organized as follows. In Section 2 we develop the theoretical tool to analyze the ODR properties and linear characteristics of the 1D PC. In Section 3, we discuss the results obtained on the ODR properties of the cryolite based 1DPC. Finally, in Section 4, we conclude the paper.

II. MATERIAL AND METHOD

To calculate the dispersion relation and reflection characteristics for the incident electromagnetic wave the Maxwell's equation is solved numerically by the transfer matrix method [15].

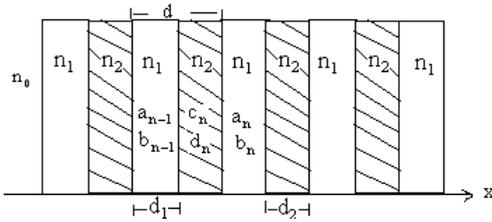


Figure 1. Periodic refractive index profile of the structure having refractive indices n1 and n2 respectively

The geometry of the structure under study is shown in the Figure 1. Consider the propagation of EM wave along x-axis normal to the interface in one-dimensional system composed of periodic arrays of two different materials with a refractive index n1 and n2 and layer thickness d1 and d2. The indices of refraction of the system are given as,

$$n(x) = \begin{cases} n_1, & 0 < x < d_1 \\ n_2, & d_1 < x < d_2 \end{cases} \quad (1)$$

with $n(x) = n(x + d)$, where d_1 and d_2 are the thicknesses of the layers and $d = d_1 + d_2$ is the period of the structure. The electromagnetic field distribution within each layer can be expressed as the sum of right- and left-hand side propagating wave. The electric field within the both layers of the nth unit cell can be written as,

$$E_1(x) = [(a_n e^{-ik_1(x-nd)}) + (b_n e^{ik_1(x-nd)})] e^{i\omega t} \quad (2)$$

$$E_2(x) = [(c_n e^{-ik_2(x-nd)}) + (d_n e^{ik_2(x-nd)})] e^{i\omega t} \quad (3)$$

Where $k_i = \left[\left(\frac{n_i \omega}{c} \right)^2 - \beta^2 \right]^{\frac{1}{2}} = \frac{n_i \omega}{c} \cos \theta_i$, θ_i is the ray angle in the i^{th} layer ($i = 1, 2$), β is the propagation constant and n_i is the refractive index of the constituent layers. The coefficients a_n , b_n , c_n , and d_n are related through the continuity boundary conditions at the interfaces $x = (n - 1)d$ and $x = (n - 1)d + d_2$. This continuity condition leads to the matrix equations, which relates the coefficient in the first layer of the n^{th} cell, is given as,

$$\begin{pmatrix} a_{n-1} \\ b_{n-1} \end{pmatrix} = T_n \begin{pmatrix} a_n \\ b_n \end{pmatrix} \quad (4)$$

where T_n is called the transfer matrix given by

$$T_n = \begin{pmatrix} A & B \\ C & D \end{pmatrix} \quad (5)$$

The matrix elements A, B, C and D are

$$A = e^{ik_1 d_1} \left[\cos k_2 d_2 + \frac{1}{2} i \left(\eta + \frac{1}{\eta} \right) \sin k_2 d_2 \right] \quad (6)$$

$$B = e^{-ik_1 d_1} \left[\frac{1}{2} i \left(\eta - \frac{1}{\eta} \right) \sin k_2 d_2 \right] \quad (7)$$

$$C = e^{ik_1 d_1} \left[-\frac{1}{2} i \left(\eta - \frac{1}{\eta} \right) \sin k_2 d_2 \right] \quad (8)$$

$$D = e^{-ik_1 d_1} \left[\cos k_2 d_2 - \frac{1}{2} i \left(\eta + \frac{1}{\eta} \right) \sin k_2 d_2 \right] \quad (9)$$

The parameter η depends on the polarization. For the TE and TM polarizations, η is given by

$$\eta_{TE} = \frac{k_1}{k_2} \quad (10)$$

$$\eta_{TM} = \frac{k_1 n_2^2}{k_2 n_1^2} \quad (11)$$

For finite stacks, the coefficient of right and left hand side propagating wave in both sides of the multilayer structure a_N and b_N , are calculated by multiplying transfer matrix of each cell as,

$$\begin{pmatrix} a_0 \\ b_0 \end{pmatrix} = T_1 T_2 \dots T_N \begin{pmatrix} a_N \\ b_N \end{pmatrix} \quad (12)$$

where N is the total number of the cell. The coefficient of reflection is given by solving above matrix equation with the condition $b_N = 0$ as,

$$r_N = \begin{pmatrix} b_0 \\ a_0 \end{pmatrix} \quad (13)$$

Thus the reflectivity (or reflectance) of the structure may be calculated as,

$$R_N = |r_N|^2 \quad (14)$$

Now, according to Bloch theorem, the electric field vector is of the form $E(x) = E_{K(x)} e^{i(\omega t - Kx)}$ where $E_{K(x)}$ is periodic with 'd'. For the determination of K as a function of eigenvalue, the equation is written as,

$$\begin{bmatrix} A & B \\ C & D \end{bmatrix} \begin{bmatrix} a_n \\ b_n \end{bmatrix} = e^{iKd} \begin{bmatrix} a_n \\ b_n \end{bmatrix} \quad (15)$$

The solution of this matrix equation leads to the dispersion relation for the PC structure

$$K(\omega) = \left(\frac{1}{d} \right) \cos^{-1} \left[\cos(k_1 d_1) \cos(k_2 d_2) - \frac{1}{2} \left(\eta + \frac{1}{\eta} \right) \sin(k_1 d_1) \sin(k_2 d_2) \right] \quad (16)$$

The existence of omnidirectional photonic band gap in one dimensional photonic crystal requires the incident waves to be launched from vacuum or from a low refractive index ambient medium [5].

III. RESULT AND DISCUSSION

In this section we present the numerical analysis of the proposed PC structure and show the Omni -directional reflection bands for both TE and TM polarizations. The value of refractive index for the Na_3AlF_6 is taken as 1.34 and Ge is 4.2 at $\lambda_0 = 800$

nm. The thickness of the layers are taken as according to quarter wave stacks condition i.e. $d_1 = \lambda_0 / 4 n_1 = 149.25$ nm and $d_2 = \lambda_0 / 4 n_2 = 47.61$ nm. The reflection spectra obtained for the total number of layers $N=25$ is depicted in Figure 3 for both TE and TM polarizations. From the study of these figures it is observed that as the angle of incidence increases the reflection band width increases for TE mode while it decreases for TM mode and at the same time the reflection band is shifted towards lower wavelength region (blue shifted) as shown in (Table 1). The width of reflection band has larger value for the TE mode in comparison to the TM mode. At oblique incidence, different polarizations (TE and TM) exhibit different reflectance. When a

PC reflects light of both polarizations incident at any angle within a certain frequency range, the PC is said to have a complete omnidirectional bandgap. We observe that light waves of a wavelength range from (595.8 nm to 845.8 nm) are always reflected from the proposed structure irrespective of the state of polarization. Thus one dimensional multilayered Na_3AlF_6 -Ge photonic crystal structure shows omnidirectional reflection band in the wavelength region (595.8nm - 845.8nm) and can be used as a good candidate for making wavelength filters in the visible – near infrared spectrum from (595.8nm-845.8nm) wavelength range when N is large enough.

Table 1. Total reflectance region band width for [Cryolite-Ge] at the various incident angles for TE and TM modes for N=25

Na_3AlF_6 -Ge N=25	TE			TM		
	LOWER BAND EGDE (nm)	UPPER BAND EDGE (nm)	BAND GAP (nm)	LOWER BAND EGDE (nm)	UPPER BAND EDGE (nm)	BAND GAP (nm)
$\Theta=0^\circ$	595.8	1217	621.2	595.8	1217	621.2
$\Theta=30^\circ$	564.8	1202	637.2	580.8	1136	555.2
$\Theta=60^\circ$	500.6	1173	672.4	552	952.2	400.2
$\Theta=89^\circ$	468.3	1158	689.7	538.7	845.8	307.1

Omni directional reflection band = 845.8 nm-595.8 nm=250 nm

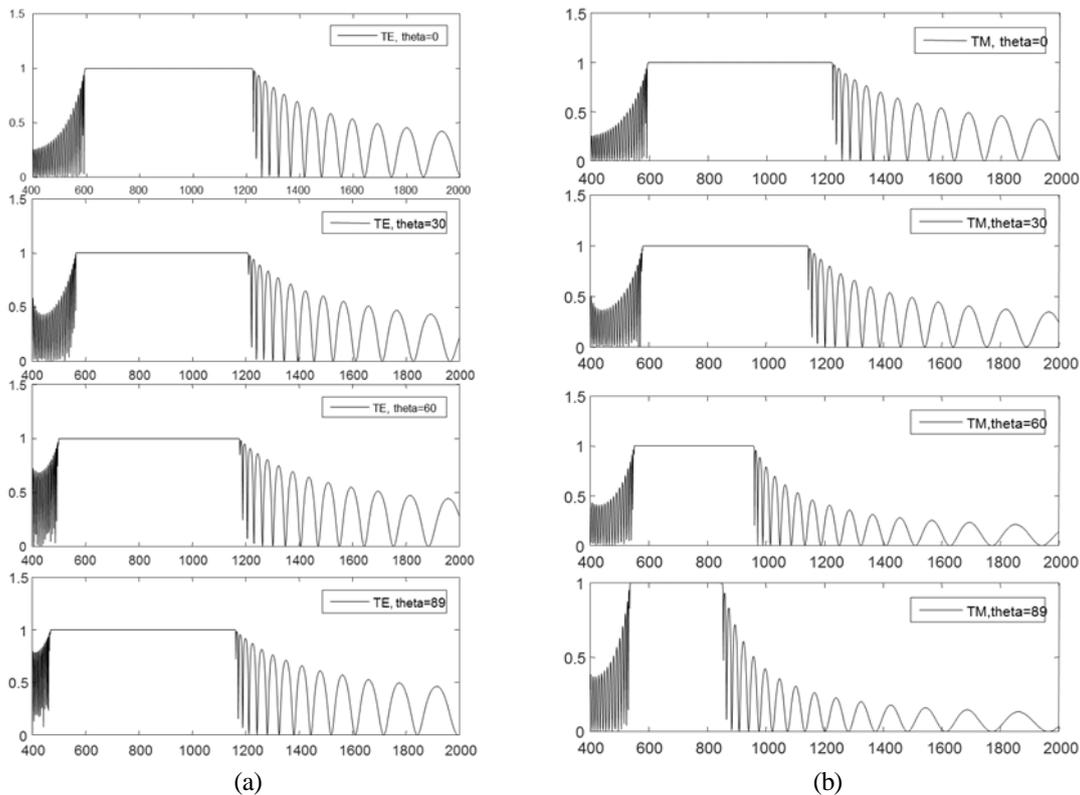


Figure 2. (a) The reflectivity spectra for TE modes showing the total reflection region and bandwidth for $n_1=1.34$, $n_2=4.2$, $d_1=149.25$ nm, $d_2=47.61$ nm and $N=25$ at various incident angles, for $\theta=0^\circ, 30^\circ, 60^\circ, 89^\circ$. (b) The reflectivity spectra for TM modes showing the total reflection region and bandwidth for $n_1=1.34$, $n_2=4.2$, $d_1=149.25$ nm, $d_2=47.61$ nm and $N=25$ at various incident angles, for $\theta=0^\circ, 30^\circ, 60^\circ, 89^\circ$.

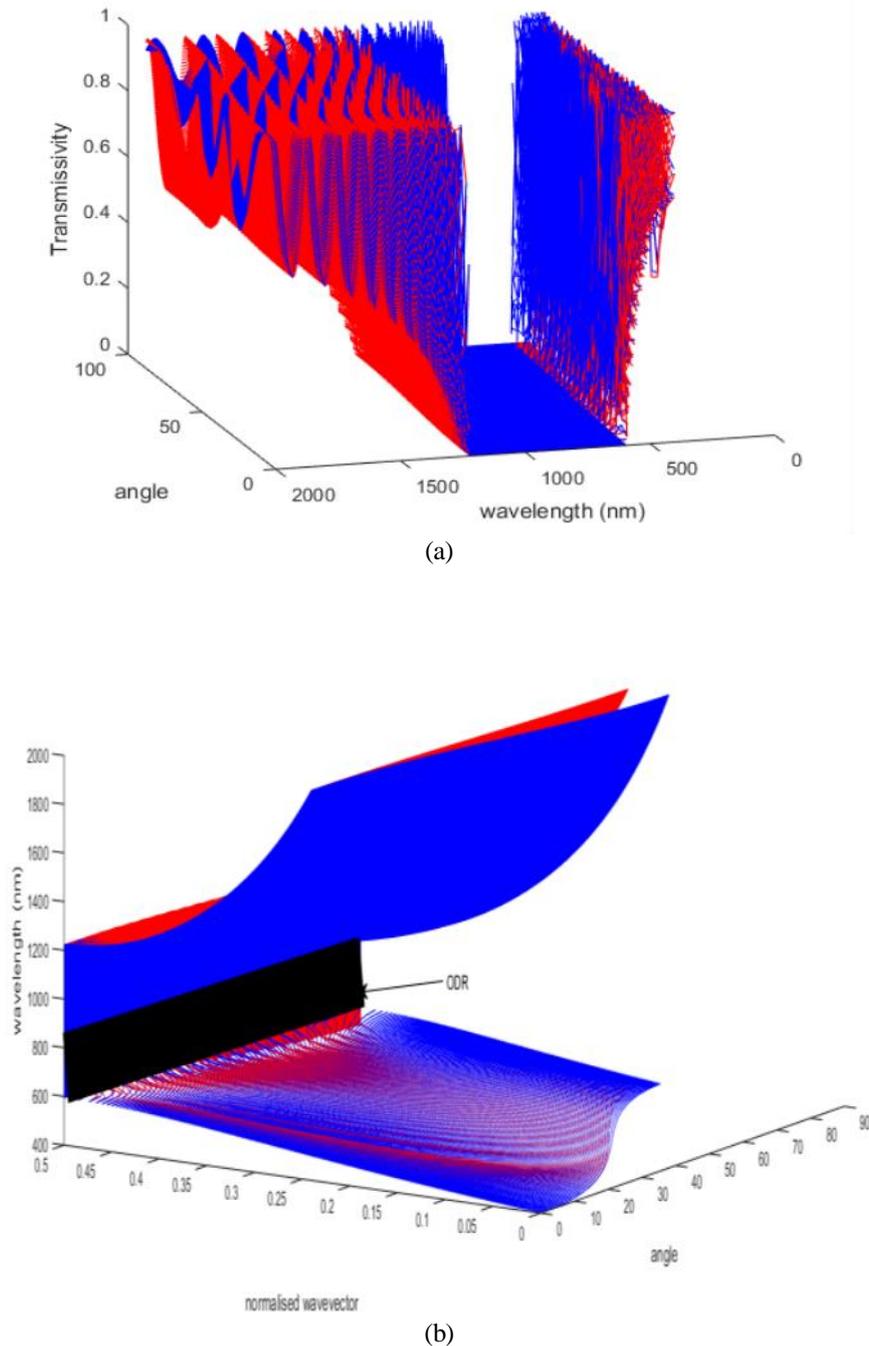


Figure 3: (a) Transmissivity variation with wavelength and angle of incidence (deg.) for TE modes (Red lines) and TM modes (Blue lines) in multilayered Cryolite-Ge (b) Dispersion relation with variation in angle of incidence (deg.) for TE modes (Red lines) and TM modes (Blue lines) in multilayered Cryolite-Ge.

IV. CONCLUSIONS

We have investigated theoretically the propagation of light wave in multilayered dielectric medium and proposed the omnidirectional bandgap properties in 25 layer 1DPC with 150 nm thick cryolite films and 50 nm thick Ge films as alternate layers. The propagation properties and dispersion characteristics for both TE and TM modes for the structure of interest is analyzed using transfer matrix method and it is observed that there exists an omnidirectional band gap of 250 nm from (845.8nm-595.8nm) in the visible-near infrared

region which makes this structure to be used as wavelength filters. We observe that cryolite based photonic crystal structure can be used as a good candidate for complete inhibition of transmission of frequency in near IR region and it can be tuned by changing the design parameters. The proposed use of these multilayered nanostructures is as omnidirectional reflectors and near IR wavelength cutoff filters which are used in many imaging sensors in the field of optical technology. In medical physics this window is useful in Blood oxygenation measurements. This window of wavelength range is also useful in infrared photography.

REFERENCES

- [1] Yablonovitch, Eli. "Inhibited spontaneous emission in solid-state physics and electronics." *Physical review letters* 58, no. 20, 2059 (1987). <https://link.aps.org/doi/10.1103/PhysRevLett.58.2059>
- [2] John S., "Strong localization of photons in certain disordered dielectric super lattices", *Phys. Rev. Lett.*, Vol. 58, 2486–2489, (1987). <https://doi.org/10.1103/PhysRevLett.58.2486>
- [3] Joannopoulos J. D., Villeneuve P., and Fan S., "Photonic crystals: putting a new twist on light", *Nature*, Vol. 386, 143, London, (1997). <http://dx.doi.org/10.1038/386143a0>
- [4] Yuan K., Zheng X., Li C.L., and She W.L., "Design of omnidirectional and multiple channeled filters using one dimensional photonic crystals containing a defect layer with a negative refractive index" *Phys. Rev. E*, Vol. 71, (066604):1–5, (2005). <https://doi.org/10.1364/JOSAA.24.000A28>
- [5] Fink Y., Winn J.N., Fan S., Chen C., Michel J., Joannopoulos J.D., and Thomas E.L., "A dielectric omnidirectional reflector", *Science*, Vol. 282, 1679–1682, (1998). <https://web.stanford.edu/group/fan/publication/Fink-Science-282-1679-1998.pdf>
- [6] Dekkicha, L. and R. A. Naoum, "A new 900-bend in a two-dimensional photonic crystal waveguide using topology optimization," *Progress In Electromagnetics Research*, Vol. 56, 183-193, (2006). doi:10.2528/PIER05011601.
- [7] Dmitriev, V., "2D magnetic photonic crystals with square lattice group theoretical stand point," *Progress In Electromagnetics Research*, Vol. 58, 71-100, (2006). doi:10.2528/PIER05061701
- [8] Wang, X., X. Hu, Y. Li, W. Jia, C. Xu, X. Liu, and J. Zi, "Enlargement of omnidirectional total reflection frequency range in one-dimensional photonic crystals by using heterostructures," *Appl. Phys. Lett.*, Vol. 80, No. 23, 4291-4293, (2002). doi:10.1063/1.1484547
- [9] Wang, L.-G., H. Chen, and S. Y. Zhu, "Omnidirectional gap and defect mode of one-dimensional photonic crystals with single negative materials," *Phys. Rev. B*, Vol. 70, 1-6, (2004).
- [10] Lee, H. Y. and T. Yao, "Design and evaluation of omnidirectional one-dimensional photonic crystals," *J. Appl. Phys.*, Vol. 93, 819-830, (2003). doi:10.1063/1.1530726
- [11] Jiang, H. T., H. Chen, H. Li, and Y. Zhang, "Omnidirectional gap and defect mode of one-dimensional photonic crystals containing negative index materials," *Appl. Phys. Lett.*, Vol. 83, 5386-5388, (2003). doi:10.1063/1.1637452
- [12] Srivastava, S. K. and S. P. Ojha, "Reflection and anomalous behavior of refractive index in defect photonic band gap structure," *Microwave and Opt. Technol. Lett.*, Vol. 38, 293-297, (2003). doi:10.1002/mop.11041
- [13] Srivastava, S. K. and S. P. Ojha, "Enhancement of omnidirectional reflection bands in one-dimensional photonic crystal structures with left-handed materials," *Progress In Electromagnetics Research*, Vol. 68, 91-111, (2007). doi:10.2528/PIER06061602
- [14] Yeh, P., *Optical Waves in Layered Media*, John Wiley and Sons, New York, (1988).
- [15] Kratschmer, W., L. D. Lamb, K. Fostiropoulos, and D. R. Huffman, "Solid C60: a new form of carbon," *Nature*, Vol. 347, 354-358, (1990). doi:10.1038/347354a0
- [16] Rosseinsky, M. J., A. P. Ramirez, S. H. Glarum, D. W. Murphy, R. C. Haddon, A. F. Hebard, T. T. M. Palstra, A. R. Kortan, S. M. Zahurak, and A. V. Makhija, "Superconductivity at 28K in RbxC60," *Phys. Rev. Lett.*, Vol. 66, 2830-2832, (1991). doi:10.1103/PhysRevLett.66.2830.
- [17] Taigaki, K., I. Hirosawa, T. W. Ebbesen, J. Mizuki, Y. Shimakawa, Y. Kubo, J. S. Tsai, and S. Kuroshima, "Superconductivity in sodium and lithium containing alkali-metal fullerenes," *Nature*, Vol. 356, 419-421, (1992). doi:10.1038/356419a0.
- [18] Haddon, R. C., A. F. Hebard, M. J. Rosseinsky, D. W. Murphy, S. J. Duclos, K. B. Lynos, B. Miller, J. M. Rosamillia, R. M. Flemming, A. R. Kortan, A. J. Muller, R. H. Eick, S. M. Sahurak, R. Tycko, G. Dabbagh, and F. A. Thiel, "Conducting films of C60 and C70 by alkali metal doping," *Nature*, Vol. 350, 320-322, (1991). doi:10.1038/350320a0.
- [19] Hwang, K. S. and D. Mausehall, "Vectorial electron transfer from and interfacial photo excited perphyrin to ground state fullerene C60 and C70 and from ascorbate to triplet C60 and C70 in a lipid layer." *J. Am. Chem. Soc.*, Vol. 114, 9705-9706, (1992). doi:10.1021/ja00050a086.
- [20] Hwang, K. S. and D. Mausehall, "Photoinduced electron transport across a lipid bilayer mediated by C70," *Nature*, Vol. 361, 138-140, (1993). doi:10.1038/361138a0.
- [21] Hiromichi, K. H., E. Y. Yasushi, A. Y. Yohji, K. K. Koichi, H. T. Takaaki, and Y. S. Shigeo, "Dielectric constants of C60 and C70 — thin films," *J. Phys. Chem. Solids*, Vol. 58, 19-23, (1997). doi:10.1016/S0022-3697(96)00113-8.
- [22] Wu, C. J., "Transmission and reflection in a periodic superconductor/dielectric film multilayer structure," *J. Electromagn. Waves Appl.*, Vol. 19, 1991-1996, (2006). doi:10.1163/156939305775570468.
- [23] Zhang, Q. R., Y. Q. Fu, and N. C. Yuan, "Characteristics of planar PBG structures with a cover layer," *J. Electromagn. Waves Appl.*, Vol. 20, 1439-1453, (2006). doi:10.1163/156939306779274264.
- [23] Srivastava, S. K. and S. P. Ojha, "Omnidirectional reflection bands in one-dimensional photonic crystal structure using fluorescence films," *Progress In Electromagnetics Research*, Vol. 74, 181-194, (2007). doi:10.2528/PIER07050202
- [25] Srivastava, R., S. Pati, and S. P. Ojha, "Enhancement of omnidirectional reflection in photonic crystal heterostructures," *Progress In Electromagnetics Research B*, Vol. 1, 197-208, (2008). doi:10.2528/PIERB07102903
- [26] S. K. Awasthi, S. P. Ojha, "Design of a Tunable Optical Filter by Using a one-dimensional ternary photonic band gap Material " *Progress In Electromagnetics Research M*, Vol. 4, 117–132, (2008). www.jpier.org/PIERM/pierm04/09.08061302.pdf
- [27] Arafa H. Aly, Mohamed Ismaeel, Ehab Abdel-Rahman, "Comparative Study of the One Dimensional Dielectric and Metallic Photonic Crystals", *Optics and Photonics Journal*, (2012), 2, 105-112. doi:10.4236/opj.2012.22014
- [28] R. Srivastava, K. B. Thapa, S. Pati, and S. P. Ojha, "Omni-direction reflection in one dimensional photonic crystal," *Progress In Electromagnetics Research B*, Vol. 7, 133-143, (2008). doi:10.2528/PIERB08020601
- [29] Zhaona Wang, Shujing Chen, Jing Zhou, Dahe Liu, "Band-edge oscillations of the diffraction spectrum of a volume hologram investigated by the air-doping model," *Appl. Opt.*, Vol. 50, issue 14, 2049-2054, (2011). <https://doi.org/10.1364/AO.50.002049>
- [30] Vipin Kumar, Mohd. Anis, Kh. S. Singh, Gulbir Singh, "Large range of omni-directional reflection in 1D photonic crystal heterostructures", *Optik - International Journal for Light and Electron Optics*, Volume 122, Issue 24, (2011), Pages 2186-2190, <https://doi.org/10.1016/j.ijleo.2011.01.012>
- [31] Laxmi Shiveshwari "Zero permittivity band characteristics in one-dimensional plasma dielectric photonic crystal " *Optik - International Journal for Light and Electron Optics*, Volume 122, Issue 17, (2011), Pages 1523-1526. <https://doi.org/10.1016/j.ijleo.2010.09.036>
- [32] Arafa H. Aly, Mohamed Ismaeel, Ehab Abdel-Rahman, "Comparative Study of the One Dimensional Dielectric and Metallic Photonic Crystals " *Optics and Photonics Journal*, 2012, 2, 105-112. <http://dx.doi.org/10.4236/opj.2012.2201>