

Review Article

Challenges in using Electrocoagulation Process in Removal of Nickel Metal in Wastewater: a Literature Review

Muhammad Ghozali Harahap^{1*}, Muhammad Sonny Abfertiawan², Mindriany Syafila³

¹Department of Environmental Engineering, Faculty of Civil and Environmental Engineering, Institut Teknologi Bandung, Bandung, Indonesia

^{2,3} Water and Wastewater Engineering Expertise Group, Institut Teknologi Bandung, Indonesia

*Corresponding Author, email: ghozaliharahap21@gmail.com



Abstract

In recent years, the surge in nickel production, driven by the growing demand for electric vehicle batteries, has raised concerns regarding environmental consequences. The nickel mining and processing industries contribute to increased nickel levels in wastewater, presenting a serious threat to aquatic ecosystems and human health. This article emphasizes the urgency of developing effective technologies for treating nickel-contaminated wastewater. Electrocoagulation emerges as a promising method, providing high efficiency, minimal sludge production, and cost-effectiveness. The article critically and systematically reviews the potential of the electrocoagulation process in nickel removal from wastewater. In the review, we identify and analyze nearly 32 studies published from 2013 to 2023. We discuss contaminant removal mechanisms and analyze trends in the use of operational parameters. This article identifies the most commonly applied conditions: aluminum electrodes, inter-electrode spacing ≥ 1 cm, current density ≤ 10 mA/cm², initial pH $6 \leq \text{pH} < 11$, electrolysis time < 60 min, batch operation, and initial nickel concentration > 50 mg/L. This comprehensive review serves as a foundational resource for advancing electrocoagulation technology in the removal of heavy metals from nickel wastewater.

Keywords: Electrocoagulation; nickel, wastewater treatment

1. Introduction

Nickel metal is widely used in various industrial and trade sectors, including in stainless steel making, electroplating processes, use in batteries, textile industry, electrical device manufacturing, and as a catalyst in chemical reactions (Kumar and Dwivedi, 2021). Even in recent years, the rampant production of electric vehicles for green energy is projected to continue to increase, which has an impact on the sustainable supply of nickel will be needed as a raw material for electric vehicle batteries. Significant global demand for nickel has driven an increase in its production. According to a United States Geological Survey (USGS) report, in 2019, Indonesia became the largest producer of nickel metal in the world after China with production reaching 487,000 tons per year.

The increasing demand for nickel metal will result in increased extraction of nickel metal from nature. This makes mining and metallurgical processes the main sources of nickel pollution in addition to natural sources such as volcanoes and geological pollution of groundwater. In mining areas, nickel pollution can occur through runoffs that carry heavy metals including nickel and flow into water bodies around the mine site and pollute the environment. Nickel metal has a high water solubility and is *nonbiodegradable*, so it can be easily absorbed and accumulated in the body of living organisms and cause serious environmental damage (Xu et al., 2018). The human body can be exposed to nickel through the food chain, especially by consuming nickel-contaminated fish from aquatic environments. The toxicity

of nickel depends on the nature of the compound and its pathway of entry into the human body, such as oral, eye, skin, or respiratory pathways. Nickel exposure is an important concern because it can cause various diseases such as respiratory damage, lung cancer, diarrhea, low blood pressure, bone defects, and others (Costa et al., 2022).

Along with technological developments, many techniques have been used to remove nickel metal from wastewater, such as chemical coagulation, adsorption, ion exchange, *reverse osmosis* and membrane filtration (Xu et al., 2018). However, most of these technologies have limitations such as expensive costs, high energy consumption, complex and long processing processes, making nickel metal processing difficult (Merma et al., 2020). Among these processing technologies, the electrocoagulation (EC) process is becoming popular due to its high contaminant removal efficiency, in-situ coagulant production, and larger and stable floc formation compared to conventional coagulation. In addition, the sludge produced in EC may be more stable and less toxic. EC effectively removes a broad spectrum of contaminants and pollutants from various water sources (Biswas and Goel, 2022). In EC technology, the dissolution of metals at the anode produces a metal hydroxide complex, which acts to eliminate colloidal particles by neutralizing the charge. This process also reduces electrostatic repulsive forces and removes dissolved contaminants through the formation of metal ligand compounds and absorption in flocs. At the same time, electro-flotation occurs due to the formation of hydrogen gas bubbles on the surface of the cathode, which causes floc to float to the reactor surface (Apshankar and Goel, 2018; Babu and Goel, 2013; Biswas and Goel, 2022).

Electrocoagulation technology has been widely applied to various types of wastewater, such as acid mine wastewater (Alam et al., 2022 & Stylianou et al., 2022), domestic wastewater (Patel et al., 2022), electroplating wastewater (Wang et al., 2021), baker's yeast wastewater (Alavijeh et al., 2022), metal plating industry wastewater (Xu et al., 2018 & Costa et al., 2022) and slaughterhouse wastewater (Adou et al., 2022). Several studies on heavy metal removal in wastewater using electrocoagulation technology have been published, but no reviews have been found on nickel metal-specific heavy metal removal using electrocoagulation from wastewater. This paper aims to address this gap by reviewing electrocoagulation studies for nickel removal from wastewater. The research objectives include elucidating the contaminant removal mechanism and analyzing factors influencing nickel reduction, with a focus on operational parameters. The contributions of this review lie in consolidating knowledge, providing insights into EC's efficacy for nickel removal, and guiding future research and environmental management efforts.

2. Methods

The database used to search the literature reviewed in this paper was limited to research published in English-language research articles and review articles published from ScienceDirect and can be downloaded through a subscription to the Bandung Institute of Technology (ITB). ScienceDirect is considered the most extensive research database and is often used by researchers around the world. Only research articles and review articles published between January 2013 and July 2023 were considered, both to keep the number of candidate references to a feasible level and because it is only relatively recently that electrocoagulation process has been considered a practically viable method for removal of heavy metals from wastewater, especially nickel metal. The search proceeded as follows. First, each of the databases was queried with the Boolean subject search: ("electrocoagulation"), ("heavy metals"), ("nickel"), ("wastewater" or "effluent" or "industrial wastewater" or "mine water"). This search was intended to capture references focused on using electrocoagulation to remove heavy metals from wastewater, specifically for nickel metal. The specific query was selected by the authors after running a number of preliminary searches to identify terms that returned the greatest number of relevant results. The search resulted in a total of 155 references. Second, a screening process was carried out by checking duplicate references and reading manually limited to the title and abstract of the publication to verify whether the literature used electrocoagulation as a treatment technology to remove nickel metal in the original wastewater or artificial wastewater that simulated wastewater, leaving 48 references. Third, the

selected literature is then filtered based on the merits of the review, and each relevant reference is manually analyzed to identify additional references that may be relevant. Full texts of candidates were obtained and confirmed for relevance as well. A total of 32 references were ultimately included in the literature review.

In this study, we collected and analyzed a number of related studies that have been conducted using a variety of different types of waste as well as a variety of diverse waste conditions. In essence, these studies have similarities in the use of electrocoagulation technology as the main method to overcome the problem of heavy metal content in nickel wastewater. Although waste characteristics and environmental parameters vary between these studies, they have a similar goal, which is to utilize electrocoagulation as a solution to remove heavy metals from nickel wastewater. By summarizing the findings of these studies, we seek to provide a more comprehensive understanding of the effectiveness of electrocoagulation technology in addressing the various challenges associated with heavy metal pollution in nickel industrial waste.

A total of 32 references were eventually included in the literature review. The summary of nickel allowance and the type of wastewater used, the initial concentration of nickel, electrode specifications, current density, wastewater pH, treatment volume, mode of operation and allowance efficiency are respectively summarized in **Table 1**. This systematic review process is summarized in **Figure 1**.

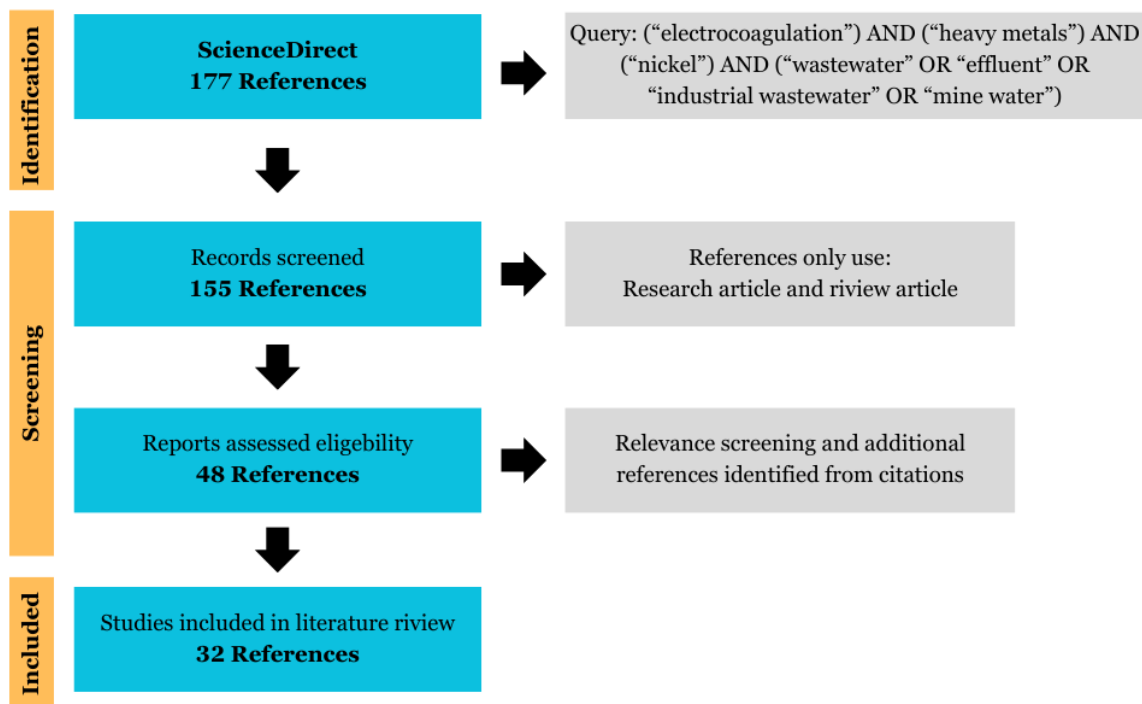


Figure 1. Literature review workflow

Framework

Here is a simple framework describing the main elements in the use of electrocoagulation to cope with nickel waste:

- I. Types of Nickel Waste
 - A. Characteristics of Nickel Waste
 - Describe the types of nickel waste present in industrial wastewater.
 - Identify sources of nickel waste.
- II. Electrocoagulation Regulation
 - A. Electrode Type Selection

- Choose the appropriate type of electrode for the electrocoagulation process, such as iron or aluminum.

- Presenting the reasons for choosing the type of electrode based on the characteristics of nickel waste.

B. Optimal Voltage Current

- Regulates the intensity of electric current required for the electrocoagulation process.

- Analyze the impact of voltage current variations on nickel metal removal efficiency.

C. Fluid and Electrolyte Concentration

- Control the concentration of liquids and the type of electrolyte used in the process.

- Presents the effect of fluid and electrolyte concentration on the effectiveness of electrocoagulation.

III. The Best Choice in Nickel Waste Handling

- Summarizing the best electrocoagulation arrangements that have been identified for nickel waste removal.

- Present recommendations based on research and analysis of the results obtained.

With this framework, you can explore how the selection of nickel waste types and the appropriate electrocoagulation arrangements can be used to achieve the best results in nickel waste management in industrial wastewater. This framework can help identify the most effective and efficient solutions to tackle nickel metal pollution in different contexts.

3. Result and Discussion

3.1 Electrocoagulation Process Illustration

The electrocoagulation process is a method of water or liquid waste treatment that uses electrochemical principles to remove solutes, solid particles, and pollutants from water (Shahedi et al., 2020). This process involves the use of a positive electrode (anode) and a negative electrode (cathode) dipped in water or liquid waste to be treated (Asfaha et al., 2021) as show in **Figure 2**. When an electric voltage is applied through the electrodes, several chemical reactions occur:

- Oxidation: At the anode, oxygen is released, and hydroxide ions are formed. This reaction helps oxidize organic materials dissolved in water.
- Reduction: At the cathode, hydroxide ions reduce heavy metals or other compounds present in the liquid waste.
- Coagulation: Electrochemical reactions also lead to the formation of small solid floc that can bind small particles and solutes in water. These floc become larger and easier to deposit.
- Precipitate: The solid particles that have coagulated can then be precipitated from the water easily.

These chemical reactions can be sequential and/or parallel. All of them are summarized in **Figure 3** which highlights the complexity and the interplay between the mechanisms of electrocoagulation process. This process helps remove a variety of contaminants from water, including heavy metals, dissolved organic matter, and solid particles. Arrow lines can be used to indicate the electric current flowing between the electrodes, and changes in the color or clarity of water before and after the electrocoagulation process can be illustrated to show improvements in water quality as show in **Figure**

4-

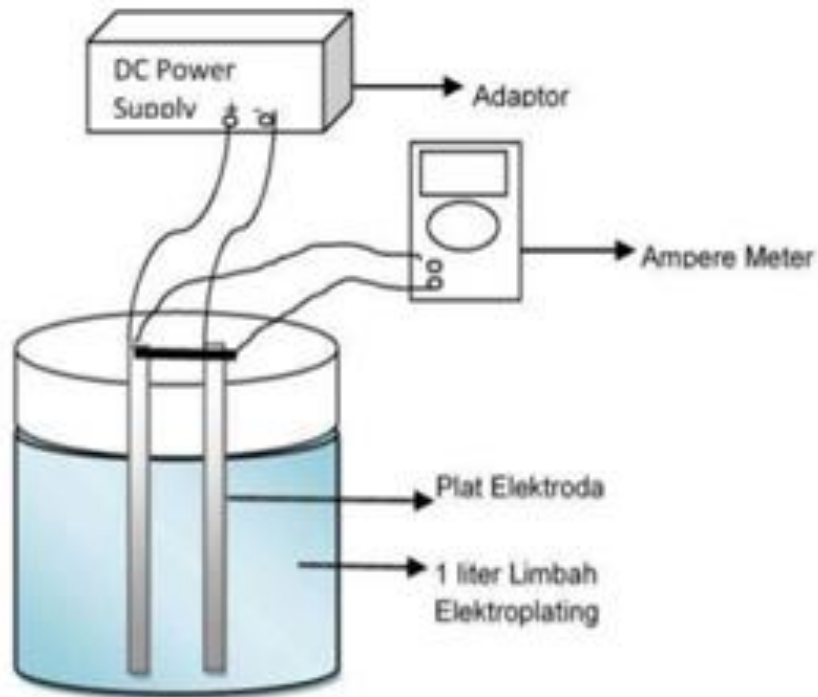


Figure 2. Scheme of electrocoagulation reactor
Source: (Zailani et al., 2018)

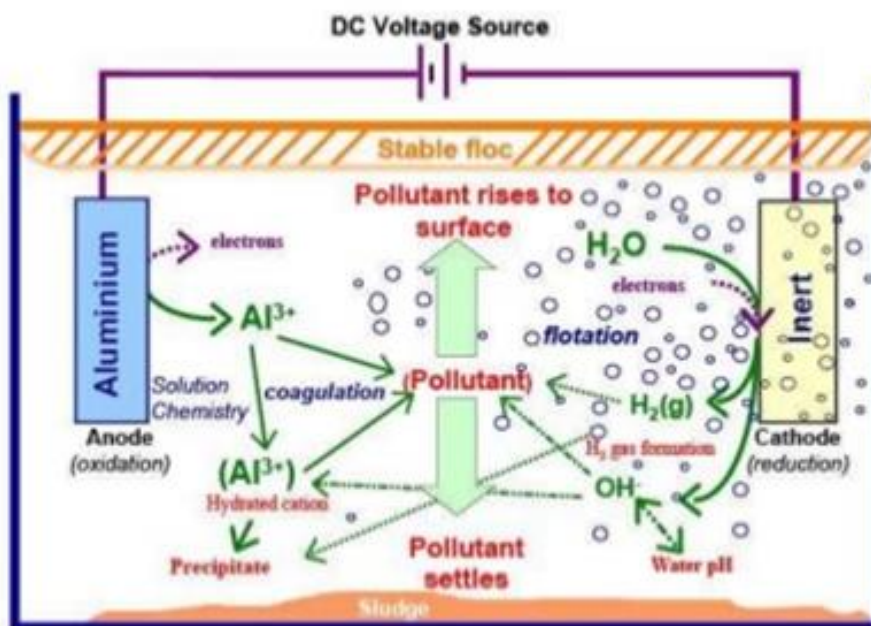


Figure 3. Illustration of electrocoagulation reactions
Source: (Hakizimana et al., 2017)



Figure 4. Before and after the electrocoagulation process (Taty, 2016)

Some electrode materials can be made of aluminum, iron, stainless steel and platinum. In this study, the anode used was aluminum. Equation (1) describes the dissolution of the aluminum anode:



Simultaneously, cathodic reactions usually occur hydrogen changes. This reaction occurs at the cathode and depending on the neutral or alkaline pH, hydrogen is produced through equation (2):



When under acidic conditions, equation (3) can best explain the change in hydrogen at the cathode.



There are several kinds of species interactions in solution in the electrocoagulation process, namely:

1. Migration to oppositely charged electrodes (electrophoresis) and aggregation to form neutral compounds.
2. Cations or hydroxy ions (OH^-) form precipitates with pollutants.
3. Metal cations interact with OH^- to form hydroxy, which has sides that adsorb pollutants (bridge coagulation)
4. Hydroxy forms large structures and clears pollutants (sweep coagulation)
5. Oxidation of pollutants thereby reducing their toxicity
6. Removal by electroflotation and adhesion of air bubbles.

In the electrochemical process, there will be a release of Al^{3+} from the electrode plate (anode) to form floc $\text{Al}(\text{OH})_3$, which is able to bind contaminants and particles in waste. In this reaction, the aluminum ion (Al^{3+}) reacts with three hydroxide ions (OH^-) to form floc aluminum hydroxide ($\text{Al}(\text{OH})_3$) which will precipitate and bind particles or contaminants in the waste as shown in **Figure 5**. This electrochemical process is one of the methods used in sewage treatment, especially in the process of separating particles from waste solutions. The resulting floc can be easily precipitated or removed from the solution, thereby reducing waste contamination and improving the quality of the water or solution produced.

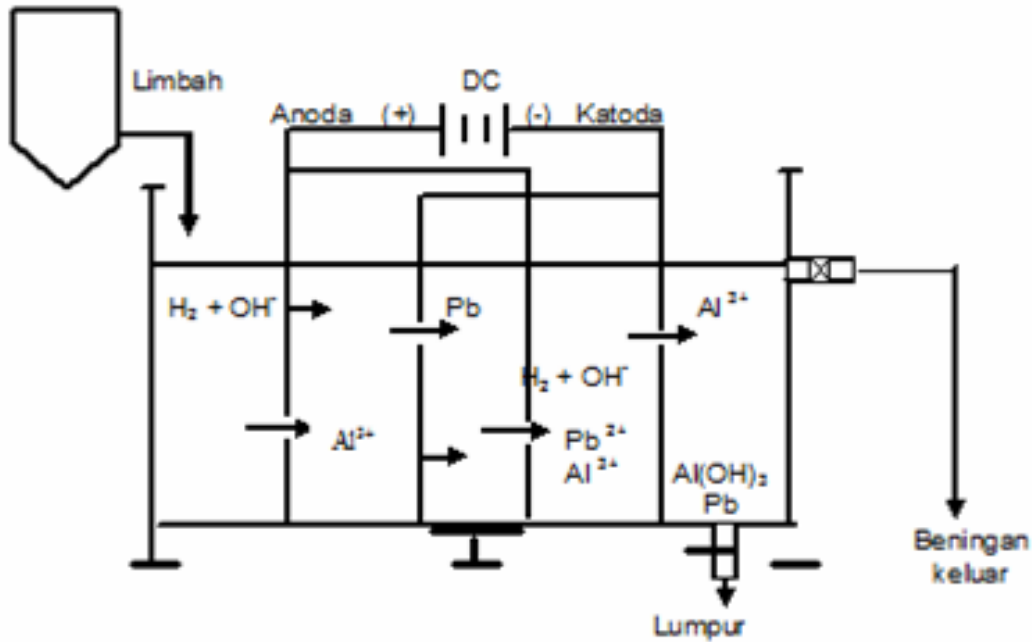


Figure 5. Electrocoagulation process
Source: (Hernaningsih & Yudo, 2007)

If in an electrolyte two electrodes are placed and direct electric current is flowed, then an electrochemical event will occur, which is a symptom of electrolyte decomposition, where positive ions (cations) move to the cathode and receive reduced electrons and negative ions (anions) move to the anode and give up oxidized electrons (Islam, 2019). The cathode of the H^+ ion of an acid will be reduced to hydrogen gas which will be free as gas bubbles.

Coagulation and flocculation are traditional methods of wastewater treatment. In this process, coagulants such as alum or ferric chloride, and other additives such as polyelectrolytes are added with certain doses to produce compounds with large particles so that they are easily separated physically (Shim et al., 2014). This is a process with many stages so that it requires a large area of land and the availability of chemicals continuously (continuous). A more efficient and inexpensive method to treat wastewater with a variety of pollutant types and minimize additives is needed in water sustainability management. Electrocoagulation is a processing method that is able to answer these problems (Drogui et al., 2007).

3.2 Nickel Removal by Electrocoagulation

Electrocoagulation (EC) is an electrochemical water treatment technology using electrodes that are electrified to produce floc in-situ through electron transfer which includes oxidation, reduction and desposition so that the process of clumping and settling fine particles in water occurs (Nur, A. 2014; Kamal, I. 2018; Ridantami, V. 2021). The electrodes used are usually made of reactive metals, such as aluminum or iron which can act as anodes and cathodes. Electrocoagulation involves several mechanisms, including anodic dissolution, hydrolysis of metal ions, precipitation of metal hydroxides, aggregation of colloidal particles, evolution of hydrogen gas, and flotation (Da et al., 2019). Therefore, EC is able to remove various types of pollutants, such as total suspended solids (TSS), organic matter, phosphates, fluorides, arsenates, and nicks through various means, including adsorption, charge neutralization, coprecipitation, sweep flocculation, and electroflotation (Hasan, F. 2022, Garcia-Segura et al., 2017; Lin et al., 2019; Chen et al., 2020). These advantages make electrocoagulation (EC) an optimal method for wastewater treatment that has a complex composition, such as industry effluent, geothermal water and mining wastewater. Recent studies reporting nickel removal using electrocoagulation are summarized in **Table 1**.

Table 1. Nickel metal removal in different types of wastewater

No	Wastewater type	Initial concentration	Electrode combination (A-C)	Inter-electrode distance	Current density/voltage	Initial pH	Mode operation	EC Time	Wastewater volume	% removal	Reference
1	Industrial effluent	313 mg/L	Al-Al	0.8 cm	6.26 mA/cm ²	8.20	Semi-continuous	2 L/min (200 min)	100 L	97.8	Vargas et al., 2023
2	Raw sanitary leachate from landfills	93 µg/L	Al-Al	2 cm	3.47 mA/cm ²	9.5	Batch	10 min	12 L	64.5	Genethliou et al., 2023
3	Synthetic wastewater containing (Ni(II)-NH ₃ -CO ₂ -SO ₂ -H ₂ O)	342 mg/L	Al-Al	0.8 m	11 mA/cm ²	8.34	Batch	50 min	25 L	95.6	Vargas et al., 2023
4	synthetic effluent similar to gold mine effluents	65 mg/L	Fe-SS	5 cm	3.75 mA/cm ²	10	Batch	60 min	2 L	76.4	Shahedi et al., 2023
5	Synthetic wastewater containing methyl orange, NiSO ₄ , and F ⁻ (NaF)	100 mg/L	He-Fe	1 cm	20 mA/cm ²	6	Batch	30 min	0.18 L	>90	Fan et al., 2023
6	Synthetic wastewater containing ZnSO ₄ , NiSO ₄ , CuSO ₄	2.5 mg/L	SS-SS	1 cm	18.75 mA/cm ² 1.5 A	6	Batch	60 min	1.8 L	98.14	Kumar et al., 2022
7	Synthetic wastewater containing Ni	331.9 mg/L	Al-Al	1 cm	8 mA/cm ²	8	Batch	37.5 min	1 L	94.52	Arabameri et al. 2022
8	Real industrial electroplating rinsing wastewater	20.01 mg/L	SS-SS	2 cm	10 Volt	9	Continuous	30 min (100 mL/min)	10 L	98.9	Abdel-Shafy et al., 2022
9	Real acid mine drainage (AMD) of copper mine	0.134 mg/L	Al-Al	0.5 cm	20 mA/cm ²	2.6	Batch	150 min	0.5 L	98	Stylianou et al., 2022
10	Synthetic wastewater containing (Ni(II)-NH ₃ -CO ₂ -SO ₂ -H ₂ O)	505 mg/L	Al-Al	1 cm	9.8 mA/cm ²	8.6	Batch	30 min	0.5 L	99.5	Vargas et al., 2022
11	Synthetic industrial wastewater containing Ni	250 mg/L	Al-Al	0.5 cm	0.95 mA/cm ²	6	Batch	30 min	10,5	75.99	Fil et al., 2022
12	Liquid waste from spent-battery	8.91 mg/L	Al-Al	1 cm	25 mA/cm ²	12.23	Batch	30 min	0.5 L	>99.5	Mufakhir et al., 2022

No	Wastewater type	Initial concentration	Electrode combination (A-C)	Inter-electrode distance	Current density/voltage	Initial pH	Mode operation	EC Time	Wastewater volume	% removal	Reference
13	recycling containing heavy metal electroplating wastewater	-	SS-SS	2 cm	30 mA/cm ²	4	Batch	70 min	0.25 L	82%	Liu et al., 2021
14	Real wastewater of ore washing from crushing screening plant	10.3 mg/L	He-Fe	1.5 cm	16 mA/cm ²	8.5	Batch	40 min	0.5 L	90.23	Altunay et al., 2021
15	Synthetic wastewater containing heavy metals	100 mg/L	Al-Al	1 cm	1.72 mA/cm ²	4	Batch	40 min	1.4 L	100	El-Ashtoukhy et al. 2020
16	Synthetic electroplating wastewater	70.524 mg/L	Al-Al	2 cm	7.79 mA/cm ²	8.5	Batch	50 min	15 L	99.7	Moersidik et al. 2020
17	Synthetic electroplating wastewater	111.3 mg/L	Al-Gr	-	1.5 A	4.8	Batch	10 min	0.2 L	88.68	Huang et al., 2020
18	Synthetic metal plating wastewater	20 mg/L	He-Fe	1 cm	4 mA/cm ²	11	Batch	60 min	0.5 L	95	Kim et al. 2020
19	Real mine water	9.28 µg/L	He-Fe	-	18 mA/cm ²	6.5	Batch	60 min	1 L	97	Mamelkina et al., 2019
20	Synthetic wastewater	100 mg/L	Al-Al	2 cm	6 Volt	7.5	Batch	20 min	0.2 L	78	Jerroumi et al., 2019
21	Real wastewater of metal plating	8.1 mg/L	He-Fe	3 cm	45 mA/cm ²	5	Batch	30 min	0.5 L	96	Oden and Sari-Erkan 2018
22	Effluent of an electroplating plant in Bandung City, Indonesia	10.523 mg/L	Al-Cu	5 cm	5 Volt	3.4	Batch	90 min	0.5 L	14.8	Djaenudin et al. 2018
23	Real flue gas desulfurization wastewater	3.37 mg/L	Fe-C-Al	0.5 cm	5 A	4	Batch	25 min	1 L	98	Liu et al., 2017

No	Wastewater type	Initial concentration	Electrode combination (A-C)	Inter-electrode distance	Current density/voltage	Initial pH	Mode operation	EC Time	Wastewater volume	% removal	Reference
24	Real wastewater containing Ni-EDTA	7.82 mg/L	Fe-SS	10 cm	0.5 A	3	Batch	30 min	0.45 L	95.14	Ye et al., 2016
25	Real wastewater of metal plating	57.5 mg/L	He-Fe	1.5 cm	4 mA/cm ²	9.5	Batch	45 min	0.6 L	98	Al-Shannag et al., 2015
26	Real waste fountain solution	1.7 mg/L	Faith-Al	1.5 cm	8 mA/cm ²	5	Batch	60 min	0.22 L	95	Prica et al., 2015
27	Synthetic wastewater containing Ni	100 mg/L	Al-Al	1 cm	22.5 mA/cm ²	6	Continuous	25 min	0.12 L	>90	Lu et al., 2015
28	Wastewater of electroplating industry	16.30 mg/L	Al-Al	1 cm	12 Volt	8.15	Batch	210 min	1.8 L	88.2	Lekhlif et al., 2014
29	Synthetic bilge water	1.5 mg/L	Al-Al	-	6 mA/cm ²	-	Continuous	0.5 L/min	45 L	92.7	Rincón and La Motta, 2014
30	Real wastewater of effluent metal plating	165 mg/L	Fe-SS	0.6 cm	90 mA/cm ²	9	Batch	60 min	0.61 L	100	Beyazit et al., 2014
31	Synthetic wastewater	100 mg/L	Al-Al	4 cm	72.5 mA/cm ²	5	Batch	180 min	1 L	90	Vlachou et al., 2013
32	Synthetic wastewater	-	He-Fe	2.5 cm	12 Volt	7	Batch	10 min	1.5 L	97.6	Khosa et al., 2013

3.3 Electrode Type

The efficiency of removal of nickel metal using EC technology depends largely on the selection of electrode materials used. Electrode selection is based on consideration of existing contaminants, desired wastewater quality, cost, and oxygen evolution potential (Biswas B and Goel S., 2022). Based on the review conducted, it was found that there are four types of electrodes most commonly used in the EC process to remove nickel metal from wastewater. These types of electrodes include aluminum (Al-Al), iron (Fe-Fe), stainless steel (SS-SS), and combination electrodes (Fe-Al, Fe-SS, Fe-Cu, etc.) as shown in **Table 1**. Based on the results of 32 studies that have been analyzed in **Table 1**, the percentage of the number of studies with the use of each type of electrode can be seen in **Figure 6**.

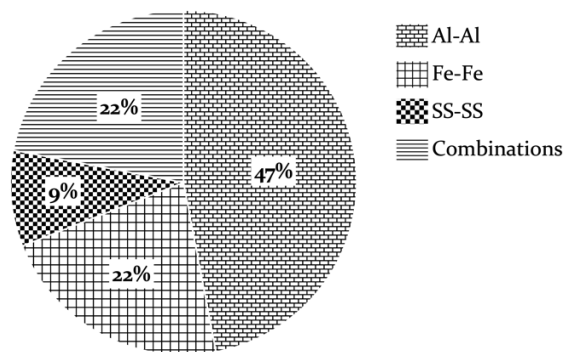


Figure 6. Percentage of the amount of research in the use of this type of electrode

Based on **Figure 6**, it can be seen that the type of electrode with the largest percentage is aluminum, which is present in 47% of studies. This shows that aluminum is the most common type of electrode used in the process of removing nickel metal in wastewater, because it has a good level of removal efficiency. For example, it was noted that the lowest nickel metal removal reached 64% in synthetic wastewater (Genethliou et al., 2023), while the highest nickel metal removal reached 100% in synthetic wastewater with an initial concentration of 100 mg/L (El-Ashtoukhy et al., 2020).

Aluminum electrodes perform well in nickel metal removal because they produce hydrolyzed species containing Al(III). This species has a more effective ability to disrupt nickel metal particles, thus aiding in the process of deposition and separation of the metal from wastewater. The high valence charge of Al(III) in hydrolyzed species of aluminum electrodes allows for a denser electric bilayer. This significantly increases the ability of electrocoagulation to coagulate nickel metal particles. As a result, larger floc forms and are easier to filter or deposit. In addition, aluminum also follows Faraday's law in terms of dissociation estimates. This property makes aluminum electrodes easier to predict their performance compared to other electrodes such as iron. The high solubility of aluminum species in electrolyte solutions also plays a role in providing consistency and reliability of aluminum electrode performance (Zaied et al., 2020).

Based on the analysis of the review literature (**Table 1**), it was found that the use of electrode types in the process of removing nickel metal from wastewater is still limited to the four types of electrodes mentioned earlier. Therefore, further research is needed involving the use of other types of electrodes, such as magnesium and galvanized iron, which may have potential advantages in terms of cost, efficiency, and other factors that may provide advantages in the process.

3.4 Distance Between Electrodes

The distance between the electrodes is a control parameter in the design of the reactor for the removal of nickel metal from wastewater. In the process of electrocoagulation, the electrostatic field generated depends on the distance between the anode and cathode. Therefore, to achieve maximum nickel metal removal efficiency, it is important to maintain the distance between the electrodes in optimal

conditions. In this research literature, the distance between electrodes is divided into two categories, namely < 1 cm and ≥ 1 cm. This was done to see the trend of using the distance between electrodes that are most widely used in electrocoagulation processes to remove nickel metal from wastewater. The percentage of the number of studies with the use of each distance between electrodes can be seen in **Figure 7**, while more detailed information can be found in **Table 1**.

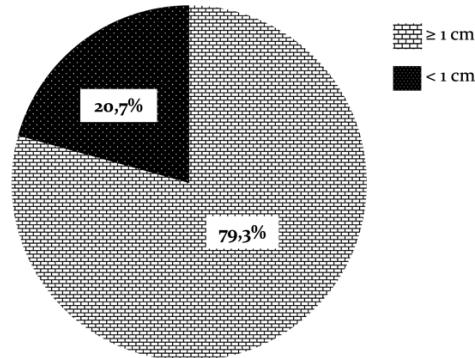


Figure 7. Percentage of the amount of research in the use of distance between electrodes

Based on **Figure 7**, it can be seen that there are as many as 79.3% of studies that use the distance between electrodes with a size of ≥ 1 cm with a range of 1-10 cm. While the remaining 20.7% of studies used a distance between electrodes with a size of < 1 cm with a range of 0.5-0.8 cm. From this literature review, it can be seen that the use of distances between electrodes with a size of < 1 cm and ≥ 1 cm both have good removal efficiency. For example, in the study of Fill, B. A. (2022), a distance between electrodes of less than 1 cm was used, which is 0.5 cm, which resulted in a nickel metal removal efficiency of 75.99% in artificial wastewater with an initial concentration of 250 mg/L. Meanwhile, the distance between the electrodes ≥ 1 cm, which is 10 cm, resulted in a nickel metal removal efficiency of 95.14% in original wastewater containing Ni-EDTA with an initial concentration of 7.82 mg/L (Ye, X. et al., 2016).

The reason why most researchers use the distance between electrodes with a size of ≥ 1 cm is because the efficiency of pollutant removal increases with increasing the distance between the electrodes from the "minimum distance" to the "optimum distance". This happens because as the distance between the electrodes increases, the electrostatic effect decreases and results in slower movement of ions. This gives more time for the resulting metal hydroxide to coagulate and form floc which increases the efficiency of pollutant removal in solution. However, if the distance between the electrodes is too large from the "optimum distance", the efficiency of pollutant removal will decrease. This is because the time it takes for the ions to reach the electrode increases as the distance between the electrodes increases. As a result, electrostatic attraction is reduced and floc formation required to agglomerate pollutants is also reduced (Aoudj et al., 2015).

While the reason fewer researchers use the distance between electrodes with a size of < 1 cm is because the narrow distance between electrodes can cause low pollutant removal efficiency. This is due to the fact that the resulting metal hydroxide which acts as floc to remove pollutants through sedimentation, degrades due to collisions between metal hydroxide particles with one another due to high electrostatic attraction (Aoudj et al., 2015). In addition, the narrow distance between electrodes can cause a short circuit because the current density becomes too high (Fekete et al., 2016).

Therefore, research is needed to determine the optimal distance between electrodes to remove nickel metal in wastewater. Because the optimal distance between electrodes can vary depending on the type of electrode used, the type of particles to be deposited, and other operational parameters. For example, wastewater with relatively high conductivity, the use of a larger distance between electrodes can reduce energy consumption (at a constant current density). On the other hand, wastewater with low

conductivity, the use of smaller distances between electrodes can minimize energy consumption (Bazrafshan et al., 2015).

3.5 Current Density

Current *density* in the electrocoagulation process refers to the amount of electric current that flows through the electrode surface area unit submerged in water or solution to be treated (mA/cm^2). Current density plays an important role in the electrocoagulation process because it affects coagulant dose, bubble production, size, and increase in floc number which can affect EC efficiency (Bazrafshan et al., 2015). According to Faraday's law, with an increase in current density, the rate of dissolution of the anode increases. This leads to an increase in the amount of metal hydroxide floc which results in an increase in the efficiency of pollutant removal. In addition, the rate of formation of H_2 bubbles also increases with the increase in current density, while the size of the bubbles tends to shrink (Holt et al., 2004). In this research literature, current density values are grouped into four categories, namely $\leq 10 \text{ mA}/\text{cm}^2$, $10 < \text{mA}/\text{cm}^2 \leq 20$, $20 < \text{mA}/\text{cm}^2 \leq 30$, and $> 30 \text{ mA}/\text{cm}^2$. It aims to identify trends in the use of optimal current density in the removal of nickel metal from wastewater. The percentage number of studies using each category of current density values can be seen in **Figure 8**, while more detailed information on the effect of current in the removal of nickel metal from wastewater can be found in **Table 1**.

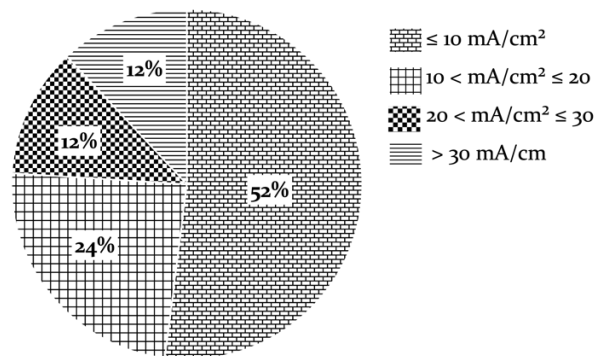


Figure 8. Percentage of the amount of research in the use of current density

From the analysis shown in **Figure 8**, it can be observed that the use of a current density of $\leq 10 \text{ mA}/\text{cm}^2$ is the most commonly used in studies of nickel metal removal from wastewater, accounting for 52% of the total studies analyzed. These results indicate that relatively low current densities are still considered effective in removing nickel metal from wastewater. Several studies have reported optimal current density values for electrocoagulation processes in the removal of nickel metal from wastewater (Vargas et al., 2023; Shahedi et al., 2023; Arabameri et al., 2022; Liu et al., 2021). As the current density increases, the time required to remove nickel metal tends to decrease. The effect of current density on nickel metal removal has been studied previously (Fil et al., 2022). Nickel metal removal efficiencies of 58.29%, 68.71%, 75.99%, and 92.38% were achieved within 30 minutes electrolysis time with current density values of 0.24, 0.48, 0.95, and 1.43 mA/cm^2 respectively.

Furthermore, current densities of $10 < \text{mA}/\text{cm}^2 \leq 20$ are also quite commonly used in studies of nickel metal removal from wastewater, accounting for 24% of the total research. These results indicate interest in exploring slightly higher current densities in order to improve the efficiency of nickel metal removal. However, keep in mind that the effectiveness of using current density in this range still depends on other operational parameters such as temperature, pH, electrode distance, and mixing speed (Chen, 2004; Moussa et al., 2017).

Meanwhile, the use of current densities of $20 < \text{mA}/\text{cm}^2 \leq 30$ and $> 30 \text{ mA}/\text{cm}^2$ had a lower percentage of research, each of which was 12% (**Figure 8**). These results suggest that the use of higher current density values tends to be used less frequently in the context of nickel metal removal from

wastewater. This is because the use of very high current densities can cause several problems, such as coagulant overdose, high energy consumption, and electrode passivation. Coagulant overdose can lead to restabilization of particles present inside the reactor due to reversal of charge from negative to positive on the particle surface which can ultimately result in decreased efficiency in pollutant removal (Biswas and Goel., 2022).

An increase in current density above the optimum value does not provide a significant increase in efficiency in pollutant removal. This is because at higher current density values, the amount of metal hydroxide floc produced is sufficiently available for the pollutant sedimentation process (Vik et al., 1984; Bukhori, 2008; in Bazrafshan et al., 2015). Therefore, increasing the current density above the optimum value will only increase energy consumption without providing significant benefits in pollutant removal efficiency. This is in line with the results of previous research conducted by Altunay et al. (2021), where the efficiency of nickel metal removal only increased until it reached an optimum current density of 21.3 mA/cm² with an allowance rate of 98.14%. However, at higher current densities, there was a decrease in the allowance efficiency from 98.14% to ±93% at a current density of 42.67 mA/cm².

The selection of the right current density is very important in the process of electrocoagulation. A current density that is too low may not be enough to trigger the necessary electrochemical reactions, while a current density that is too high can cause unwanted electrolysis effects, such as particle restabilization, excess gas formation or short circuit. Therefore, it is necessary to regulate the current density according to specific conditions to achieve optimal results in the electrocoagulation process.

3.6 Initial pH

Initial pH is an important operating factor affecting electrocoagulation performance and plays an important role in the removal of nickel metal in wastewater. This is because the formation of metal hydroxide floc which acts as a coagulant agent in the electrocoagulation process is strongly influenced by the pH of the solution. At lower pH (less than 4), cationic species such as Al³⁺ and Al(OH)²⁺ are dominant, but at mid-range pH (4 to 9), some monomer species such as Al(OH)²⁺, and polymer species, namely, Al₆(OH)₁₅³⁺, Al₇(OH)₁₄⁴⁺, Al₁₃(OH)₃₄⁵⁺ are more dominant which eventually turn into aluminum hydroxide removal agents (Al(OH)₃). At higher pH (greater than 10), cathodic corrosion occurs, and the concentration of Al(OH)₄⁻ increases at the expense of the removing agent (aluminum hydroxide) (Bayramoglu et al., 2003; Alinsafi et al., 2004; Merzouk et al., 2009 in Arabameri et al., 2022). Choosing the right pH can optimize the formation of large, dense flocs, which in turn allows for more effective deposition of pollutants (Biswas and Goel., 2022). In this literature study, the initial pH value was grouped into three categories, namely $1 \leq \text{pH} < 6$, $6 \leq \text{pH} < 11$ and $11 \leq \text{pH} \leq 14$. The aim is to identify trends in the optimal use of initial pH in the removal of nickel metal from wastewater using the electrocoagulation method. The percentage of the number of studies with the use of each initial pH can be seen in **Figure 9**, while more detailed information can be found in **Table 1**.

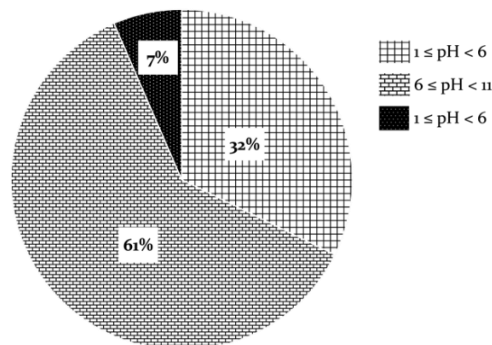


Figure 9. Percentage of the amount of research in the use of initial pH

From the analysis shown in **Figure 9**, it can be observed that the use of initial pH in the range of $6 \leq \text{pH} < 11$ is the most widely used in studies of nickel metal removal from wastewater, accounting for 61.3% of the total studies analyzed. These results indicate that an initial pH that is relatively neutral to

slightly alkaline is considered effective in removing nickel metal from wastewater. Several studies have reported optimal initial pH values for electrocoagulation processes in nickel metal removal from wastewater (Vargas et al., 2023; Fil et al., 2022; Altunay et al., 2021). The effect of initial pH on nickel metal removal has been studied previously (Arabameri et al., 2022). The results obtained in this study, reported an evolution in nickel removal efficiency from 75.73% to 96.87% by increasing the initial pH from 5 to 9 at a concentration of 300 mg/L with a current density of 7 mA/cm².

Based on the results of research conducted by Arabameri et al., (2022) states that the optimal performance of the electrocoagulation system for nickel removal occurs in the initial pH range of around 7 to 9. In this pH range, the dominant removal mechanism is adsorption by aluminum hydroxide (Al(OH)₃), and the joint removal mechanism is precipitation by hydroxide ions (OH⁻) in the form of Ni(OH)₂. Adsorption by aluminum hydroxide allows the capture and separation of nickel particles from solution, while precipitation by hydroxide ions results in the formation of insoluble Ni(OH)₂ precipitate. These two mechanisms work synergistically to improve the efficiency of nickel removal in the electrocoagulation process. During the electrocoagulation process, the initial pH of the solution gradually increases due to the production of hydroxide ions (OH⁻) at the cathode.

Furthermore, the initial pH with a range of $1 \leq \text{pH} < 6$ is also quite commonly used in research on nickel metal removal from wastewater, accounting for 32.3% of the total research. These results indicate interest in exploring the initial pH classified as acidic in order to improve the efficiency of nickel metal removal. Liu, et al., (2021) studied nickel metal removal from electroplating wastewater using EC and found that the pH of the solution has a significant influence on the removal efficiency of Ni²⁺. They conducted experiments at different pHs in the pH range of 1, 2, 3, 4, 5, 6, 7, and 8. The results showed that the nickel removal efficiency increased from 42% to 78% by increasing the initial pH from 1 to 4. However, there was a decrease in efficiency from 78% to 67% by increasing the initial pH from 4 to 8. Maximum nickel removal efficiency is obtained at pH 4. It can be implied that the efficiency of nickel removal is reduced by increasing or lowering the pH of the solution from the optimum pH.

Meanwhile, the use of initial pH with a range of $11 \leq \text{pH} \leq 14$ has a lower percentage of research of 6.5% (**Figure 9**). This pH range is categorized as an extreme alkaline state. These results suggest that the use of higher initial pH values is less likely to be used in the context of nickel metal removal from wastewater. This is because the use of very high initial pH can cause several problems, such as increased concentrations of Al(OH)₄⁻, high corrosion potential, and electrode passivation. At very high pH conditions, there is an increase in hydroxide ion (OH⁻) concentration, which leads to the formation of the more dominant Al(OH)₄⁻ complex. As a result, the formation of metal hydroxide floc such as Al(OH)₃ becomes more difficult. Al(OH)₃ acts as a coagulant agent that is effective in removing nickel metal from solution. However, at very high pH, the formation of large, dense floc becomes difficult, so the flocculation and deposition ability of pollutant particles is inhibited (Arabameri et al., 2022). This condition is the same as the results obtained in the study of Shahedi et al. (2023) reported that by increasing the pH from 10 to 12, the nickel residual concentration increased from 45 mg / L to 61 mg / L with an initial concentration of 56 mg / L.

3.7 Electrolysis Time

Electrolysis time can significantly affect the processing efficiency of the electrocoagulation process (Esfandian et al., 2017). The pollutant removal efficiency increases as the electrolysis time is extended, but after reaching the optimal electrolysis time, the pollutant removal efficiency stabilizes and does not increase further. This process involves the formation of metal hydroxides through anode dissolution and cathode reduction. Under conditions of a fixed current, an increase in electrolysis time leads to an increase in the amount of metal hydroxide, OH⁻, and H₂ bubbles produced. Longer electrolysis times result in the absorption of more contaminants by hydroxyl ions, resulting in improved floc formation and pollutant removal efficiency. However, given a longer electrolysis time than the optimum electrolysis time, the pollutant removal efficiency does not increase because the floc supply is sufficient,

it can even cause the electrode to become passive due to a long duration of time, leading to a decrease in the pollutant removal rate. Although the increase in electrolysis time slightly increases the effectiveness of the allowance, it is not always applied due to high energy consumption in addition to electrode consumption. Given the maintenance costs and process efficiency, it is necessary to determine the optimum electrolysis time. In addition, increased conductivity can increase the current passing through the cell and the rate of pollutant removal. Therefore, the electrolysis time required to achieve the desired removal efficiency becomes shorter (Biswas and Goel., 2022; Titchou et al., 2021; Zaied et al., 2020, Bazrafshan et al., 2015,). In this review literature, electrolysis time is divided into two categories, namely < 60 and \geq 60 minutes. This was done to see the trend of using electrolysis time which is most widely used in the electrocoagulation process to remove nickel metal from wastewater. The percentage of the number of studies with the use of each electrolysis time can be seen in **Figure 10**, while more detailed information can be found in **Table 1**.

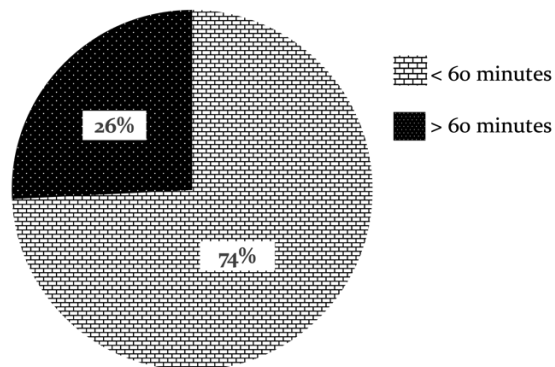


Figure 10. Percentage of the amount of research in the use of electrolysis time

Based on **Figure 10**, it can be seen that most studies (74.2% of the total 32 studies analyzed) tend to use electrolysis time < 60 minutes with a range of 10-60 minutes. This shows that the efficiency of Ni allowance reaches the optimal level in that time span. In addition, the use of a shorter electrolysis time (< 60 minutes) will result in lower consumption of electrode and electrical energy so that it is in great demand to reduce costs, so in addition to the faster allowance process, costs are also more muran. However, it must still be considered that not under all conditions the optimum electrolysis time is achieved in the range of 10-60 minutes (< 60 minutes), which is very dependent on the conditions of initial concentration and current density. For example, Vergas et al. (2022) investigated the effect of electrolysis time on nickel removal. Different electrolysis times of up to 50 minutes were tested with a Ni concentration of 342 mg/L, an applied current density of 211 mA/cm², at pH 8.34. The results showed that the use of an electrolysis time of 50 minutes (< 60 minutes) was able to produce a maximum nickel removal rate of 99.7%, with lower energy consumption of 16.86 kWh/kg Al³⁺, 2.438 kWh/kg Ni and an adsorption capacity of 5,819 mg Ni/g Al³⁺. In the same context, Liu, Y. et al. (2021) evaluated the effect of reaction time on electroplating wastewater treatment containing Ni. Increasing the electrolysis time from 10 to 60 minutes increases the removal efficiency from 44% to 79% using a current density of 30 mA/cm², pH 4 and aluminum electrode.

As for the use of electrolysis time > 60 minutes, it only covers 25.8% of all studies that have been analyzed (**Figure 10**). This phenomenon illustrates the low interest in the use of long electrolysis times, because the longer the duration of electrolysis needed to achieve optimal conditions, the greater the cost required. This is due to the increase in electrode consumption and electrical energy over time electrolysis, which directly impacts the increase in operational costs. Moreover, if the electrolysis time passes through optimal conditions, the efficiency in the removal of pollutant metals tends to be constant and may even decrease due to electrode passivation due to prolonged use. Therefore, if researchers want to improve the efficiency of elimination, it is advisable to avoid electrolysis time variations exceeding 60 minutes in order

to reduce electrode consumption and high electrical energy, which can result in a significant increase in operational costs. An alternative solution is to add electrolyte or modify the pH of wastewater, which may accelerate the achievement of optimal electrolysis time conditions without sacrificing high electrode consumption and electrical energy. The increase in conductivity has the potential to increase the current passing through the cell as well as increase the rate of pollutant removal. Therefore, the electrolysis time required to achieve the desired removal efficiency becomes shorter (Titchou et al., 2021).

3.8 Operation Mode

The electrocoagulation (EC) process has become a promising method in wastewater treatment to address heavy metal contamination, including nickel. This method involves the use of electrochemical reactions to coagulate and precipitate dissolved or dispersed particles in wastewater. In the context of EC usage, there are two operating modes that are commonly used, namely batch operation mode and continuous operation mode. The batch operation mode involves treating a limited amount of wastewater at one specific time period, while the continuous operation mode involves the continuous flow of wastewater through an electrocoagulation cell. These two modes of operation have their own advantages and disadvantages, depending on the purpose of processing and the existing operational conditions. In this review literature, operating modes are classified into two groups, namely batch and continuous. This separation aims to identify the dominant trend in the use of operating modes in electrocoagulation processes in removing nickel metal from wastewater. The percentage of studies adopting each mode of operation can be found in **Figure 11**, while more details are found in **Table 1**.

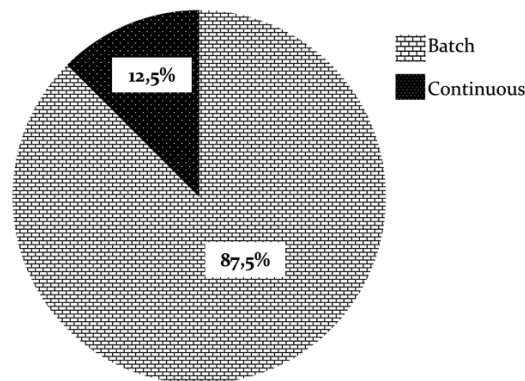


Figure 11. Percentage of the amount of research in the use of operating modes

Based on the analysis of the results shown in **Figure 11**, it can be seen that the batch operation mode has a significant proportion, reaching 87.5% of the total 32 studies. This indicates that in electrocoagulation studies to remove nickel metal from wastewater, the most widely adopted mode of operation is batch. In batch operation mode, the electrocoagulation process is carried out in a single stage where a wastewater sample is fed into an electrocoagulation cell, processed for a certain period, and then stopped upon reaching the desired conditions. The batch operation mode is often chosen by researchers during the nickel removal phase due to its simple installation, flexible batch reactor dynamics, as well as its ability to observe a wide range of operational conditions that are particularly suitable for laboratory-scale research (Mohora et al., 2012; Khandegar and Saroha, 2013; Kobya et al., 2013; Song et al., 2017). There are also reports showing that in batch-type electrocoagulation reactors, investigations regarding factors affecting efficiency (such as concentration, pH, electric current, processing time, etc.) give more accurate results compared to continuous-type reactors (Kobya et al., 2013; Islam, S. D. U. 2023). Another advantage of batch reactors is their ability to be used in decentralized treatment systems, which is particularly useful in rural areas with small volume water treatment needs. Batch reactors allow the treatment of a fixed volume of water in each cycle. In addition, the study of parameters that change over time is easier to do

in a batch reactor. In the electrolysis process, coagulants are formed continuously through dissolution of the anode, resulting in pollutant removal and changes in the pH of the solution over time (Shokri and Fard., 2022 & Biswas and Goel., 2022).

In contrast, based on the data shown in **Figure 11**, the use of continuous operation mode only reached a percentage of 12.5% of the total 32 studies. These results indicate that although still relatively rare, continuous operation mode is still used in some studies to overcome nickel metal pollution in wastewater. The continuous mode of operation involves the continuous flow of wastewater through an electrocoagulation cell over a period of time. EC systems with continuous flow operation mode operate in steady conditions, especially at static concentrations and flow rates without time lag, making them a more suitable choice for the treatment of large volumes of waste on an industrial scale. This approach provides benefits in the form of reduced electrolysis time, reduced operational costs, more efficient energy consumption, and reduced sludge formation. The removal efficiency of nickel metal can also be managed more effectively in this system thanks to the ability to pre-optimize operational conditions (Khandegar and Saroha., 2013; Bazrafshan et al., 2015; Sandoval et al., 2021; Islam, S. D. U. 2023). Overall, although the design and operation of continuous EC systems may be more complex, continuous mode of operation has the potential for more efficient treatment and is more suitable for industrial applications that require continuous wastewater treatment. This advantage arises because the continuous mode of operation is more suitable and economically feasible for large-scale operations. Several studies examined nickel removal using a continuous mode of operation. As with previous research, a continuous flow system was applied to set aside oil and heavy metal emulsions (copper, nickel, and zinc) in vessel wastewater. A flow rate of 0.5 L/min was kept constant during the experiment, and a current density of 10 Amperes was applied. The results of this study showed that the efficiency of nickel removal reached 92.5% using aluminum electrodes (Rincón and La Motta, 2014).

The reason for the limited research on continuous mode of operation may lie in several factors. One is the complexity of application which is generally associated with a larger scale, as well as the challenge of controlling the variables involved. This may contribute to the lack of publications or research reviewing the continuous mode of operation, as its success requires a greater allocation of funds and various other resources. Not only that, continuous operation mode is often applied after achieving optimal results from experiments in batch operation mode which of course takes time and a fairly long process. Based on the above explanation, several factors may influence the choice of mode of operation in electrocoagulation research, including the type and volume of wastewater treated, treatment objectives, expected efficiency, resource availability, and technical capabilities. Batch operation mode tends to be more suitable for laboratory-scale research or initial experiments, while continuous operation mode can be more suitable for implementation on an industrial scale.

3.9 Initial Concentration

In the context of the application of EC for the elimination of nickel metal from wastewater, one of the main factors affecting the effectiveness of the process is the initial concentration of nickel in the waste sample. The effectiveness of pollutant removal tends to decrease as the initial concentration increases at a fixed current density. This happens because the amount of metal ions produced remains constant at an unchanged current density during the EC process. As a result, when pollutant concentrations are higher, metal hydroxide production may be insufficient to form adequate clumps of pollutant molecules in the sample. In addition, higher initial concentrations can also extend processing time. Therefore, to remove pollutants with high initial concentrations, a higher quantity of coagulant species is required, which can be achieved through an extension of the electrolysis time or an increase in the applied current (Biswas and Goel., 2022 & Islam, S. D. U. 2023).

This is in line with previous research on nickel removal in synthetic industrial wastewater containing Ni. This study involved an aluminum electrode at a constant current density of 0.95 mA/cm², pH 6, and an electrolysis time of 30 minutes. The results of this study noted that an increase in the initial

concentration from 25 to 1000 mg/L resulted in a gradual decrease in nickel removal efficiency. This efficiency decreased from 95.34% (initial concentration 25 mg/L) to 91.18% (50 mg/L), 86.72% (100 mg/L), 75.99% (250 mg/L), 62.33% (500 mg/L), to 45.09% (1,000 mg/L) (Fil et al., 2022).

In this research literature, the initial concentration of nickel (C_0) is grouped into three categories, namely $C_0 \leq 1$ mg/L, $1 < C_0 \leq 50$ mg/L, and $C_0 > 50$ mg/L. This grouping was carried out to identify the dominant trend in the use of initial concentrations of nickel in the electrocoagulation process in removing nickel metal from wastewater. In addition, we will also discuss how variations in the initial concentration of nickel in EC applications can affect the efficiency of nickel metal removal from wastewater. The percentage of studies adopting each of the initial nickel concentration categories can be found in **Figure 12**, while more detailed information can be accessed in **Table 1**.

Based on the results of the analysis in **Figure 12**, it can be seen that the use of initial concentrations of nickel in the range of $C_0 \leq 1$ mg/L is present in 10% of the total 30 studies analyzed. This indicates that although the number of studies using very low initial concentrations of nickel is relatively small, attention to the treatment of low-concentration waste remains a consideration in the application of EC. The elimination efficiency of nickel metal may reach high levels in this range, as observed in previous studies. For example, in electrocoagulation treatment

for Real Acid Mine Drainage (AMD) from copper mining with an initial concentration of 0.134 mg/L, the elimination efficiency reached 98% by reaching a final concentration of 0.0027 mg/L at a current strength of 20 mA/cm², pH 2.6, and an electrolysis time of 150 minutes using aluminum electrodes (Stylianou et al., 2022). Despite the high efficiency, it is important to consider the practical limitations of these results, given that very low nickel concentrations may be less common in industrial contexts. Despite the high efficiency, the application of EC on an industrial scale may be challenging due to this very low initial concentration of nickel.

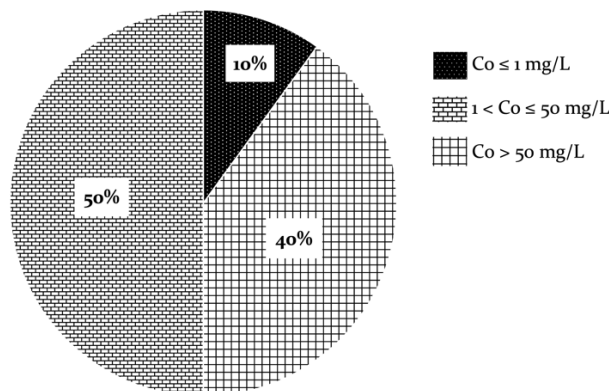


Figure 12. Percentage of the amount of research in the use of Initial Concentration

Meanwhile, in the range of $1 < C_0 \leq 50$ mg/L, the percentage of utilization of the initial concentration of nickel is high, reaching 40% of the total 30 studies analyzed. This suggests that most studies tend to use samples with moderate concentrations of nickel, representing more realistic conditions in a variety of industries or common domestic environments. Analysis of the data in **Table 1** reveals that the elimination efficiency of nickel metal tends to be optimal in this range. For example, in electrocoagulation treatment for Real Wastewater of Metal Plating with an initial concentration of 8.1 mg/L, elimination efficiency reaches 96% at a current strength of 45 mA/cm², pH 5, and electrolysis time of 30 minutes using iron electrodes (Oden and Sari-Erkan., 2018).

Furthermore, the initial concentration of nickel > 50 mg/L had the highest percentage, covering 50% of the total 30 studies. This shows that electrocoagulation has been widely applied to remove nickel metal in wastewater with high concentrations. Thus, electrocoagulation has the potential to be used in industrial waste with severe levels of pollution. For example, in a previous study, the use of

electrocoagulation in a batch system with aluminum electrodes was able to remove nickel with a very high concentration, which is 331.9 mg/L in Synthetic Wastewater containing Ni. This study achieved elimination efficiency of 94.51% by reaching a final concentration of 18.2 mg/L at a current strength of 8 mA/cm², pH 8, and electrolysis time of 37.5 minutes (Arabameri et al. 2022).

3.10 Coagulation Treatment Potential

Coagulation treatment, particularly in the form of electrocoagulation, can be used to remove nickel metal from industrial wastewater. The result of the electrocoagulation process can be measured in terms of the amount of nickel metal successfully removed or attached to the cathode. Here is a detailed description of the potential electrocoagulation treatment and how to measure the results:

Electrocoagulation Treatment Potential for Nickel Metal Removal

1. Electrocoagulation Process Regulation

- Determine the type of electrode to use, such as iron or aluminum electrodes.
- Adjusts the voltage current applied to the electrodes.
- Set parameters such as processing time and electrolyte concentration if needed.

2. Electrocoagulation Process

- Regulates the flow of wastewater through an electrocoagulation cell containing electrodes.
- When an electric current is activated, an electrochemical reaction takes place at the electrode that results in the formation of solid flocs.
- Nickel metal particles in wastewater will interact with the floc of solids formed.

3. Yield Measurement

- Measures the amount of nickel metal attached to the cathode as an indicator of removal effectiveness.
- It can be measured by calculating the weight of nickel metal collected at the cathode in units of grams per unit of time (for example, grams per minute).

4. Qualitative Analysis

- In addition to quantitative measurements, qualitative analysis can also be performed to examine the extent to which nickel metal has been removed from wastewater.
- Analytical techniques such as atomic emission spectrometry or mass spectrometry can be used to check the level of nickel pollution in wastewater before and after treatment.

Interpretation of Results

Measured measurement results in the form of the number of grams per minute of nickel attached to the cathode will provide a clear understanding of the efficiency of the electrocoagulation process in the removal of nickel metal from wastewater. The higher the amount of nickel collected at the cathode in a unit of time, the more effective the process will be.

4. Conclusions

This work has found 32 research studies on the application of electrocoagulation for removing nickel from different types of waste water. The studies showed that batch systems using aluminum electrodes with current density ≤ 10 mA/cm², electrolysis time < 60 min, initial nickel concentration > 50 mg/L, initial pH in the range of $6 \leq \text{pH} < 11$ and distance between electrodes ≥ 1 cm, were the most used. Consequently, the findings of this study will offer valuable insights for researchers and practitioners in enhancing the efficiency of the electrocoagulation process for nickel removal.

Overall, the electrocoagulation process shows great potential in treating nickel in wastewater. However, there are several areas in which more work is needed to make EC technology globally reliable in wastewater treatment. These include:

- Further studies need to be performed to study the effect of other parameters, such as the shape and geometry of electrodes (punched hole and pitch of the holes) and electrode passivation

phenomena to reduce the operating cost of the EC process and enhance the efficiency of contaminant removal.

- Additional research is essential to explore the economic feasibility, optimization of electrolytic reactors, and advanced electrode material development.
- Conducting electrocoagulation experiments on a pilot plant scale using real industrial effluent to explore the possibility of using electrocoagulation for treatment of real industrial effluents. The combination of electrocoagulation technologies with other treatment processes such as filtration and biological treatment process, presents a holistic approach toward achieving sustainable wastewater treatment processes.

References

- Abdel-Shafy, H. I., Morsy, R. M., Hewehy, M. A., Razek, T. M., & Hamid, M. M. 2022. Treatment of industrial electroplating wastewater for metals removal via electrocoagulation continuous flow reactors. *Water Practice & Technology*, 17(2), 555-566.
- Adou, K. E., Kouakou, A. R., Ehouman, A. D., Tyagi, R. D., Drogui, P., & Adouby, K. 2022. Coupling anaerobic digestion process and electrocoagulation using iron and aluminium electrodes for slaughterhouse wastewater treatment. *Scientific African*, 16, e01238.
- Al-Shannag, M., Al-Qodah, Z., Bani-Melhem, K., Qtaishat, M. R., & Alkasrawi, M. 2015. Heavy metal ions removal from metal plating wastewater using electrocoagulation: Kinetic study and process performance. *Chemical Engineering Journal*, 260, 749-756.
- Alam, P. N., Pasya, H. L., Aditya, R., Aslam, I. N., & Pontas, K. 2022. Acid mine wastewater treatment using electrocoagulation method. *Materials Today: Proceedings*, 63, S434-S437.
- Alavijeh, H. N., Sadeghi, M., Kashani, M. R. K., & Moheb, A. 2022. Efficient chemical coagulation-electrocoagulation-membrane filtration integrated systems for baker's yeast wastewater treatment: experimental and economic evaluation. *Cleaner Chemical Engineering*, 3, 100032.
- Altunay, S., Kiliç, İ. H., Öden, M. K., & Çakmak, B. 2021. Pollutant removal from mining processing wastewater by electrochemical method. *Global NEST Journal*, 23(2), 178-185.
- Aoudj, S., Khelifa, A., Drouiche, N., Belkada, R., & Miroud, D. J. C. E. J. 2015. Simultaneous removal of chromium (VI) and fluoride by electrocoagulation-electroflotation: application of a hybrid Fe-Al anode. *Chemical Engineering Journal*, 267, 153-162.
- Apshankar, K. R., & Goel, S. (2018). Review and analysis of defluoridation of drinking water by electrocoagulation. *Journal of Water Supply: Research and Technology—AQUA*, 67(4), 297-316.
- Arabameri, A., Moghaddam, M. R. A., Azadmehr, A. R., & Shabestar, M. P. 2022. Less energy and material consumption in an electrocoagulation system using AC waveform instead of DC for nickel removal: Process optimization through RSM. *Chemical Engineering and Processing-Process Intensification*, 174, 108869.
- Asfaha, Y. G., Tekile, A. K., & Zewge, F. 2021. Hybrid process of electrocoagulation and electrooxidation system for wastewater treatment: a review. *Cleaner Engineering and Technology*, 4, 100261.
- Babu, J.M., Goel, S., 2013. Defluoridation of drinking water in batch and continuous-flow electrocoagulation systems. *Pollut. Res.* 32, 727-736.
- Bazrafshan, E., Mohammadi, L., Ansari-Moghaddam, A., & Mahvi, A. H. 2015. Heavy metals removal from aqueous environments by electrocoagulation process—a systematic review. *Journal of environmental health science and engineering*, 13, 1-16.
- Beyazit, N. (2014). Plating Effluent by Electrocoagulation. *International Journal of Electrochemical Science*, 9(8), 4315-4330.
- Biswas, B., & Goel, S. (2022). Electrocoagulation and electrooxidation technologies for pesticide removal from water or wastewater: A review. *Chemosphere*, 302, 134709.
- Chen, G. (2004). Electrochemical technologies in wastewater treatment. *Separation and Purification Technology*, 38(1), 11-41.

- Chen, Y. M., Jiang, W. M., Liu, Y., & Kang, Y. 2020. Quantitative contribution study and comparison between electrocoagulation, anode-electrocoagulation and chemical coagulation using polymer-flooding sewage. *Chemosphere*, 250, 126128.
- Costa, J. M., da Costa, J. G. D. R., & de Almeida Neto, A. F. 2022. Techniques of nickel (II) removal from electroplating industry wastewater: Overview and trends. *Journal of Water Process Engineering*, 46, 102593.
- Djaenudin, Muchlis, & Ardeniswan. 2018. Nickel removal from electroplating wastewater using electrocoagulation. In *IOP Conference Series: Earth and Environmental Science* Vol. 160, No. 1, p. 012016. IOP Publishing.
- Drogui, P., Blais, J.-F., & Mercier, G. 2007. Review of electrochemical technologies for environmental applications. *Recent Patents on Engineering*, 1(3), 257-272.
- El-Ashtouky, E. Z., Amin, N. K., Fouad, Y. O., & Hamad, H. A. 2020. Intensification of a new electrocoagulation system characterized by minimum energy consumption and maximum removal efficiency of heavy metals from simulated wastewater. *Chemical Engineering and Processing-Process Intensification*, 154, 108026.
- Esfandian, H., Samadi-Maybodi, A., Khoshandam, B., & Parvini, M. 2017. Experimental and CFD modeling of diazinon pesticide removal using fixed bed column with Cu-modified zeolite nanoparticle. *Journal of the Taiwan Institute of Chemical Engineers*, 75, 164-173.
- Fan, Y., Teglada, I. D., Zhang, G., Dai, H., Liao, B., & Lu, J. 2023. The in-situ and ex-situ adsorption of iron flocs generated by electrocoagulation: Application for nickel, fluoride and methyl orange removal. *Journal of Water Process Engineering*, 51, 103395.
- Fil, B. A., Elgün, C., Cihan, S. A., Günaşlan, S., & Yılmaz, A. E. 2022. Investigation of Nickel Removal from Heavy Metal Containing Industrial Wastewater by Electrocoagulation Method. *Journal of Electrochemical Science and Technology*, 13(4), 424-430.
- Garcia-Segura, S., Eiband, M. M. S., de Melo, J. V., & Martínez-Huitle, C. A. 2017. Electrocoagulation and advanced electrocoagulation processes: A general review about the fundamentals, emerging applications and its association with other technologies. *Journal of Electroanalytical Chemistry*, 801, 267-299.
- Genethliou, C., Tatoulis, T., Charalampous, N., Dailianis, S., Tekerlekopoulou, A. G., & Vayenas, D. V. 2023. Treatment of raw sanitary landfill leachate using a hybrid pilot-scale system comprising adsorption, electrocoagulation and biological process. *Journal of Environmental Management*, 330, 117129.
- Hakizimana, J. N., Gourich, B., Chafi, M., Stiriba, Y., Vial, C., Drogui, P., & Naja, J. 2017. Electrocoagulation process in water treatment: A review of electrocoagulation modeling approaches. *Desalination*, 404, 1-21.
- Hasan, F. 2022. Removal of Total Suspended Solids (TSS) in coal mine water by electrocoagulation technique. Final Project of Bachelor Program, Bandung Institute of Technology.
- Hernaningsih, T., & Yudo, S. 2007. Alternatif Teknologi Pengolahan Air Untuk Memenuhi Kebutuhan Air Bersih Di Daerah Pemukiman Nelayan Studi Kasus Perencanaan Penyediaan Air Bersih Di Daerah Pedesaan Nelayan Kab. Pasir, Kalimantan Timur. *Jurnal Air Indonesia*, 3(1).
- Holt, P. K., Barton, G. W., & Mitchell, C. A. 2004. Deciphering the science behind electrocoagulation remove suspended clay particles from water. *Water Science and Technology*, 50(12), 177-184.
- Huang, C. H., Shen, S. Y., Dong, C. D., Kumar, M., & Chang, J. H. 2020. Removal mechanism and effective current of electrocoagulation for treating wastewater containing Ni (II), Cu (II), and Cr (VI). *Water*, 12(9), 2614.
- Islam, S. D. U. 2023. Electrochemical remediation of arsenic and fluoride from water: A review of the current state and future prospects. *Environmental Technology & Innovation*, 103148.
- Islam, S. M. D.-U. (2019). Electrocoagulation (EC) technology for wastewater treatment and pollutants removal. *Sustainable Water Resources Management*, 5(1), 359-380.

- Jerroumi, S., Lekhlif, B., Jamal, J. E., Lakhdar, M., & Afrine, L. 2019. Investigation of electrocoagulation on the removal of nickel in waste water from an electroplating bath using aluminium and iron electrodes. *Moroccan Journal of Chemistry*, 7(4), 7-4.
- Kamal, I. 2018. Effluent processing of Clover WWTP as recycled water Using electrocoagulation with aluminum electrodes. Thesis of Master Program, Bandung Institute of Technology.
- Khandegar, V., & Saroha, A. K. 2013. Electrocoagulation for the treatment of textile industry effluent—a review. *Journal of environmental management*, 128, 949-963.
- Khandegar, V., & Saroha, A. K. 2013. Electrocoagulation for the treatment of textile industry effluent—a review. *Journal of environmental management*, 128, 949-963.
- Khosa, M. K., Jamal, M. A., Hussain, A., Muneer, M., Zia, K. M., & Hafeez, S. 2013. Efficiency of aluminum and iron electrodes for the removal of heavy metals [(Ni (II), Pb (II), Cd (II))] by electrocoagulation method. *Journal of the Korean Chemical Society*, 57(3), 316-321.
- Kim, T., Kim, T. K., & Zoh, K. D. 2020. Removal mechanism of heavy metal (Cu, Ni, Zn, and Cr) in the presence of cyanide during electrocoagulation using Fe and Al electrodes. *Journal of Water Process Engineering*, 33, 101109.
- Kobyas, M., Demirbas, E., Gebologlu, U., Oncel, M. S., & Yildirim, Y. 2013. Optimization of arsenic removal from drinking water by electrocoagulation batch process using response surface methodology. *Desalination and Water Treatment*, 51(34-36), 6676-6687.
- Kumar, J., Joshi, H., & Malyan, S. K. 2022. Removal of copper, nickel, and zinc ions from an aqueous solution through electrochemical and nanofiltration membrane processes. *Applied Sciences*, 12(1), 280.
- Kumar, V., & Dwivedi, S. K. 2021. A review on accessible techniques for removal of hexavalent Chromium and divalent Nickel from industrial wastewater: Recent research and future outlook. *Journal of Cleaner Production*, 295, 126229.
- Lekhlif, B., Oudrhiri, L., Zidane, F., Drogui, P., & Blais, J. F. 2014. Study of the electrocoagulation of electroplating industry wastewaters charged by nickel (II) and chromium (VI). *J. Mater. Environ. Sci*, 5(1), 111-120.
- Lin, J. Y., Raharjo, A., Hsu, L. H., Shih, Y. J., & Huang, Y. H. 2019. Electrocoagulation of tetrafluoroborate (BF₄⁻) and the derived boron and fluorine using aluminum electrodes. *Water research*, 155, 362-371.
- Lingkungan, P. T., Pengkajian, B., & Teknologi, P. 2016. TINJAUAN TEKNOLOGI PENGOLAHAN AIR LIMBAH INDUSTRI DENGAN PROSES ELEKTROKOAGULASI Taty Hernaningsih. 9(1), 31-46.
- Liu, S., Ye, X., He, K., Chen, Y., & Hu, Y. 2017. Simultaneous removal of Ni (II) and fluoride from a real flue gas desulfurization wastewater by electrocoagulation using Fe/C/Al electrode. *Journal of Water Reuse and Desalination*, 7(3), 288-297.
- Liu, Y., Liu, G., Wang, H., Wu, P., Yan, Q., & Vayenas, D. V. 2021. Elongation the duration of steel anode with polypyrrole modification during the electrocoagulation treatment process of electroplating wastewater. *Journal of Environmental Chemical Engineering*, 9(2), 104969.
- Lu, J., Li, Y., Yin, M., Ma, X., & Lin, S. 2015. Removing heavy metal ions with continuous aluminum electrocoagulation: A study on back mixing and utilization rate of electro-generated Al ions. *Chemical Engineering Journal*, 267, 86-92.
- Mamelkina, M. A., Vasilyev, F., Tuunila, R., Sillanpää, M., & Häkkinen, A. 2019. Investigation of the parameters affecting the treatment of mining waters by electrocoagulation. *Journal of Water Process Engineering*, 32, 100929.
- Merma, A. G., Santos, B. F., Rego, A. S., Hacha, R. R., & Torem, M. L. 2020. Treatment of oily wastewater from mining industry using electrocoagulation: fundamentals and process optimization. *Journal of Materials Research and Technology*, 9(6), 15164-15176.

- Moersidik, S. S., Nugroho, R., Handayani, M., & Pratama, M. A. 2020. Optimization and reaction kinetics on the removal of Nickel and COD from wastewater from electroplating industry using Electrocoagulation and Advanced Oxidation Processes. *Heliyon*, 6(2).
- Mohamad Zailani, L. W., Mohd Amdan, N. S., & Zin, N. S. M. 2018. Removal Efficiency of Electrocoagulation Treatment Using Aluminium Electrode for Stabilized Leachate. *IOP Conference Series: Earth and Environmental Science*, 140(1), 012049.
- Mohora, E., Rončević, S., Dalmacija, B., Agbaba, J., Watson, M., Karlović, E., & Dalmacija, M. 2012. Removal of natural organic matter and arsenic from water by electrocoagulation/flotation continuous flow reactor. *Journal of hazardous materials*, 235, 257-264.
- Moussa, D. T., El-Naas, M. H., Nasser, M., & Al-Marri, M. J. 2017. A comprehensive review of electrocoagulation for water treatment: Potentials and challenges. *Journal of environmental management*, 186, 24-41.
- Mufakhir, F. R., Yuliamsa, I. A., Juniarsih, A., Astuti, W., Sumardi, S., Handoko, A. S., & Petrus, H. T. B. M. 2022. Heavy metals removal in liquid waste from spent-batteries recycling. In *IOP Conference Series: Earth and Environmental Science* Vol. 1017, No. 1, p. 012004. IOP Publishing.
- Nur, A. 2014. Recycling of hotel domestic wastewater (grey water) using electrocoagulation of aluminum electrode pairs. Thesis of Master Program, Bandung Institute of Technology.
- Oden, M. K., & Sari-Erkan, H. 2018. Treatment of metal plating wastewater using iron electrode by electrocoagulation process: Optimization and process performance. *Process Safety and Environmental Protection*, 119, 207-217.
- Patel, P., Gupta, S., & Mondal, P. 2022. Electrocoagulation process for greywater treatment: Statistical modeling, optimization, cost analysis and sludge management. *Separation and Purification Technology*, 296, 121327.
- Prica, M., Adamovic, S., Dalmacija, B., Rajic, L., Trickovic, J., Rapajic, S., & Becelic-Tomin, M. 2015. The electrocoagulation/flotation study: The removal of heavy metals from the waste fountain solution. *Process Safety and Environmental Protection*, 94, 262-273.
- Ridantami, V. 2021. Lead Recovery (Pb) from liquid waste from soil washing using an electrocoagulation process. Thesis of Master Program, Bandung Institute of Technology.
- Rincon, G. J., & La Motta, E. J. 2014. Simultaneous removal of oil and grease, and heavy metals from artificial bilge water using electro-coagulation/flotation. *Journal of Environmental Management*, 144, 42-50.
- Shahedi, A., Darban, A. K., Jamshidi-Zanjani, A., Taghipour, F., & Homaei, M. 2023. Simultaneous removal of cyanide and heavy metals using photoelectrocoagulation. *Water*, 15(3), 581.
- Shahedi, A., Darban, A. K., Taghipour, F., & Jamshidi-Zanjani, A. 2020. A review on industrial wastewater treatment via electrocoagulation processes. *Current Opinion in Electrochemistry*, 22, 154-169.
- Shim, H. Y., Lee, K. S., Lee, D. S., Jeon, D. S., Park, M. S., Shin, J. S., Lee, Y. K., Goo, J. W., Kim, S. B., & Chung, D. Y. 2014. Application of electrocoagulation and electrolysis on the precipitation of heavy metals and particulate solids in washwater from the soil washing. *Journal of Agricultural Chemistry and Environment*, 3(04), 130.
- Song, P., Yang, Z., Zeng, G., Yang, X., Xu, H., Wang, L., & Ahmad, K. 2017. Electrocoagulation treatment of arsenic in wastewaters: a comprehensive review. *Chemical Engineering Journal*, 317, 707-725.
- Stylianou, M., Montel, E., Zissimos, A., Christoforou, I., Dermentzis, K., & Agapiou, A. 2022. Removal of toxic metals and anions from acid mine drainage (AMD) by electrocoagulation: The case of North Mathiatis open cast mine. *Sustainable Chemistry and Pharmacy*, 29, 100737.
- Titchou, F. E., Zazou, H., Afanga, H., El Gaayda, J., Akbour, R. A., & Hamdani, M. 2021. Removal of persistent organic pollutants (POPs) from water and wastewater by adsorption and electrocoagulation process. *Groundwater for Sustainable Development*, 13, 100575.

- Vargas, A. R., Guillen, C. S., Haynes, M. E. M., & AlJaberi, F. Y. 2023. Nickel removal from an industrial effluent by electrocoagulation in semi-continuous operation: Hydrodynamic, kinetic and cost analysis. *Results in Engineering*, 17, 100961.
- Vargas, A. R., Haynes, M. E. M., Guillen, C. S., & AlJaberi, F. Y. A. 2023. Removal of nickel from Ni (II)-NH₃-SO₂-CO₂-H₂O system by electrocoagulation, sedimentation and filtration processes. *Journal of Electrochemical Science and Engineering*, 13(2), 373-391.
- Vargas, A. R., Medina, M. P., Vives, A. G., Barka, N., & Riverón, A. R. 2022. Nickel removing by electrocoagulation of Ni (II)-NH₃-CO₂-SO₂-H₂O system. Kinetics, isothermal, mechanism and estimated cost of operation. *Acta Chimica Slovenica*, 69(3), 536-551.
- Vlachou, M., Hahladakis, J., & Gidakos, E. 2013. Effect of various parameters in removing Cr and Ni from model wastewater by using electrocoagulation. *Global NEST Journal*, 15(4), 494-503.
- Wang, C., Li, T., Yu, G., & Deng, S. 2021. Removal of low concentrations of nickel ions in electroplating wastewater using capacitive deionization technology. *Chemosphere*, 284, 131341.
- Xu, L., Xu, X., Cao, G., Liu, S., Duan, Z., Song, S., & Zhang, M. 2018. Optimization and assessment of Fe-electrocoagulation for the removal of potentially toxic metals from real smelting wastewater. *Journal of environmental management*, 218, 129-138.
- Ye, X., Zhang, J., Zhang, Y., Lv, Y., Dou, R., Wen, S., & Hu, Y. 2016. Treatment of Ni-EDTA containing wastewater by electrocoagulation using iron scraps packed-bed anode. *Chemosphere*, 164, 304-313.
- Zaied, B. K., Rashid, M., Nasrullah, M., Zularisam, A. W., Pant, D., & Singh, L. 2020. A comprehensive review on contaminants removal from pharmaceutical wastewater by electrocoagulation process. *Science of the Total Environment*, 726, 138095