

Regional Case Study

***Spirulina Platensis* as A Biocoagulant to Reduce Turbidity and Total Suspended Solids in Domestic Wastewater**

Fathiya Nur Afifah^{1*}, Fayza Rachmalia¹, Frista Ananda Rizky¹, Hasna Khairunnisa¹, Nida Ulhaq Filardhiani¹, Lia Kusumaningrum^{1*}

¹ Department of Environmental Science, Faculty of Mathematics and Natural Sciences, Universitas Sebelas Maret. Jalan Ir. Sutami 36A Surakarta 57126, Central Java, Indonesia

* Corresponding Author, email: fathiyaturafifah20@uns.ac.id



Abstract

It is essential to treat wastewater before it is discharged into water bodies. The wastewater treatment method that is widely used is coagulation using the synthetic coagulant PAC, whose continuous use can harm human health and reduce the pH value of the water. Therefore, wastewater treatment innovation is needed to overcome this problem. This study will examine the potential of *Spirulina platensis* as a biocoagulant to reduce turbidity and TSS. This research was conducted in 3 stages, starting from the extraction, protein test, and optimum dose test. The results showed that *Spirulina platensis* has 0.0114375% protein in 20 gr and can reduce the lowest turbidity at doses of 10-5 ml / L and 10-10 ml / L (in 2 injections) with an effectiveness value of reducing turbidity levels by 63.02% and able to reduce the lowest TSS levels at doses 10-10 ml / L (in 2 injections) with an effectiveness value of reducing levels by 85%. Based on the Wilcoxon test, it was found that the P-value < 0.05, which means that there is a significant difference in TSS values and turbidity between the results before and after *Spirulina platensis* biocoagulant treatment

Keywords: Biocoagulants; dosage; extraction; potency; *Spirulina platensis*.

1. Introduction

Domestic wastewater is one type of waste produced by anthropogenic activities that have the potential to harm living things if not treated. Domestic wastewater consists of 70% organic matter and 30% inorganic matter (Kholif 2020). High organic content can cause environmental pollution. Solids in the form of microscopic particles cause TSS (Total Suspended Solid) levels and water turbidity levels to be high. The average TSS content in wastewater reached 77.15 mg / l (Sattuang et al., 2020). In addition, domestic wastewater has an average acidity (pH) value of 6.9 (Sattuang et al., 2020). However, it can damage the environment because harmful substances or microorganisms have polluted it. Dealing domestic wastewater into untreated water bodies will cause pollution (Tariq and Mushtaq, 2023). According to PP No.22 of 2021, water pollution is defined as the entry or inclusion of living things, substances, energy, and other components into the water by human activities to exceed the established Water Quality Standards. Water pollution in a water body will impact non-optimal function, reduce aesthetic value, and can affect and increase the number of health risks (Hu et al., 2019). For this reason, treatment is needed first before water is discharged into the river body (Nurhidayanti et al., 2021). Wastewater can be treated by appropriate domestic wastewater management systems (Dirgawati et al., 2023).

Coagulants are materials used to lower colloidal charges and combine them into clots. Generally, there are two types of coagulants, namely synthetic and natural (Owodunni and Ismail 2021). Synthetic coagulants, PAC (Poly Aluminum Chloride), and orthokinetic flocculants are widely used in domestic

wastewater treatment. This is because PAC can remove color, neutralize electric charges, precipitate and reduce heavy metals (Islam and Mostafa 2020), reduce the value of Chemical Oxygen Demand (COD), and form large floc. However, its use continuously and in large quantities can reduce the pH value of water and harm health because it is neurotoxicity and triggers Alzheimer's disease due to the alum compounds contained therein.

With that, the utilization of synthetic coagulants can be replaced by the utilization of biocoagulants. Biocoagulants are coagulants made from natural ingredients obtained from nature. Biocoagulants derived from natural ingredients can be an alternative to synthetic coagulants. In previous studies, tamarind seeds, papaya seeds, aloe vera, moringa seeds (Sharma 2023), and bean seeds have been used as biocoagulants in the wastewater bioremediation process. This type is similar in the protein content that can act as a polyelectrolyte. In addition, found in microalgae, *Spirulina platensis* contains 37.5% protein (Muyassaroh et al., 2020). Another Konur (2020) study states that *Spirulina platensis* has protein levels ranging from 65-75%. The high levels of protein make *Spirulina platensis* have the potential to be a biocoagulant. This research was conducted by considering the protein content contained in spirulina which has benefits not only in the field of food and beauty but also in the field of environment. The dose of biocoagulant is determined using the optimum dose test with a jar test with two injections. This research is the first and new step for developing the potential of *Spirulina platensis* to manage liquid waste in an environmentally friendly and sustainable manner. So, this study aims to determine the potential of *Spirulina platensis* to reduce water turbidity, pH, and Total Suspended Solid (TSS).

2. Methods

2.1. Location and Research Time

This research was conducted at IPAL Pialam Yogyakarta, located on Jl. Selarong No.4a, RT.9, Rice Field Area, Pendowoharjo, Sewon District, Bantul Regency, Special Region of Yogyakarta, Indonesia. Sample testing was conducted at the Toya Wening Drinking Water Perumda Laboratory Lab in Surakarta City (Jar Test) and UPT UNS Laboratory (Protein Extraction and Test). The study was conducted from July to September 2023.

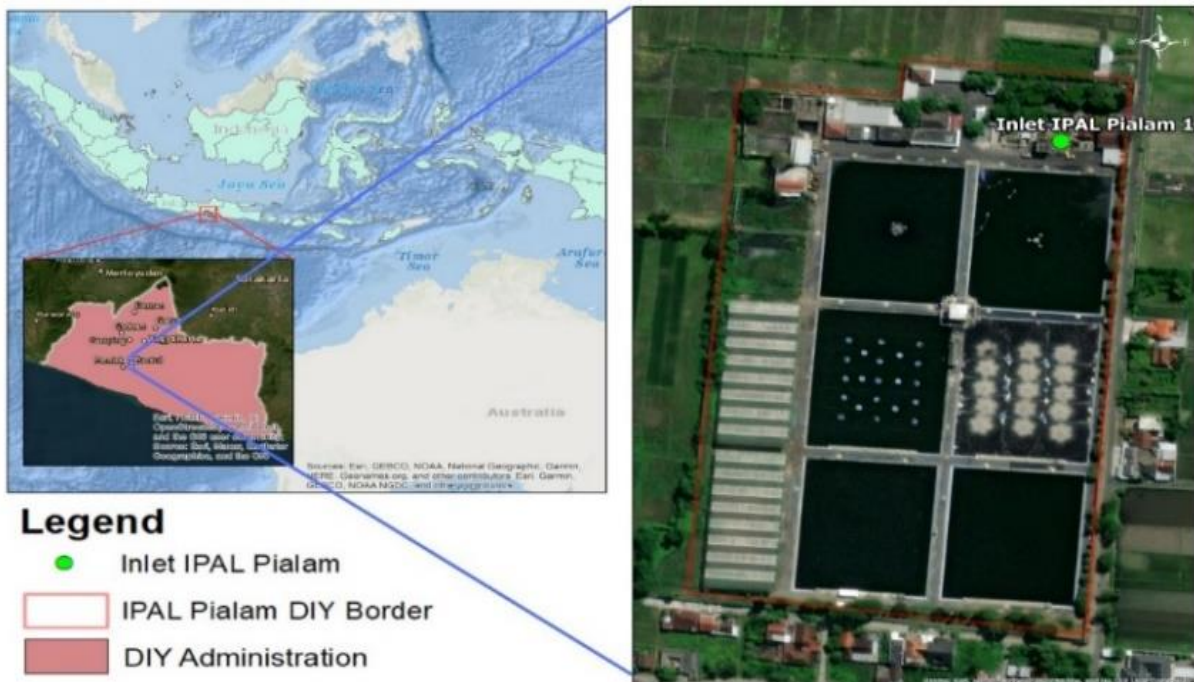


Figure 1. Sampling area

2.2. Materials

Tools used in this study include a set of glassware, stirring rods, porcelain cups, ultrasonic homogenizers model 150 VT (Biologics Inc.), centrifuge (Hettich Micro 22), spray bottles, gloves, analytical balance, 1.5 mL cuvette, quantitative UV-Vis spectrophotometer (Shimadzu UV-1800), bucket, dipper, multi-parameter lutron YK-2005WA, horiba multi-parameter water quality U-50, jerry cans, thermos, rope mine, markers, flocculator (VELP Scientifica), suction pump model 1132GL (Thomas), Eutech TN-100 turbidimeter (Thermo Scientific), petri dish, oven (Binder ED 53), pH meter (WTW Inolab series), rotary evaporator (Bibby Sterilin). The materials used include *Spirulina platensis* powder purchased from the distributor company Fuqing King Dnarmsa Spirulina Co., Ltd., aquades, aluminum foil, filter paper, tissues, ice cubes, Na₂CO₃, NaOH, CuSO₄·5H₂O 1%, Na/K Tartarat solution 1%, cioceleau folin reagent, BSA, biuret solution, domestic wastewater WWTP Pialam Yogyakarta.

2.3. Extraction of *Spirulina platensis*

Spirulina platensis powder weighed as much as 20 gr and dissolved with aquades as much as 100 mL. Then, sonicated with ultrasonic homogenizers for 15 minutes (Agustina et al., 2018) to destroy the cell wall of *Spirulina platensis* in attracting bioactive compounds. On the other hand, the timing was based on the considering the sonication effect on decreasing the active compound content in *Spirulina platensis*. Research conducted by Lestari et al., (2021) proved that an extraction time of 30 minutes was able to reduce the concentration of reduced sugar in *Spirulina platensis*, which is suspected by the longer sonication time can reduce the active compound content due to excess energy to the system, then allowed to stand for 24 hours (Fayyad et al., 2019). According to previous research, maceration time is too short, which causes the acquisition of extract results that are not optimal (Purba et al., 2019). Thus, if the extract is carried out for 12 hours, will likely cause the active compounds in *Spirulina platensis* not to be extracted optimally. After that, the maserat is inserted into a 1.5 mL cuvette to be centrifuged for 30 minutes at a speed of 10,000 rpm (Fachri et al., 2022). The extracted liquid is filtered and then evaporated with a rotary evaporator until a thick extract of 20 mL is obtained at a temperature of 50°C (Fayyad et al., 2019). The condensed extract obtained will then be weighed and calculated so that the percentage yield value is known. The equation used in calculating the percentage of yield in equation (1):

$$\% \text{ Yield} = \frac{\text{Actual Yield}}{\text{Theoretical Yield}} \times 100\% \quad (1)$$

2.4. Protein Test of *Spirulina platensis* Lowry Method

The Lowry method protein test is carried out by measuring absorption using a UV-Vis spectrophotometer. Preparation of sample solutions with reagent solutions includes Reagent A (2 gr of Na₂CO₃ dissolved in 100 ml of NaOH); Reagent B (5 mL CuSO₄·5H₂O 1% is added to 3 mL of 1% tartarite Na/K solution); Reagent C (2 mL of reagent B + 100 mL of reagent A); Reagent D (Cioceleau folin reagent diluted with aquades (1:1)).

The result of 1 ml filtrate extract is added aquades up to a volume of 4 ml. After that, 5 mL of reagent C is mixed and stirred well and allowed to stand for 15 minutes at room temperature. Then, 0.5 ml of reagent D was quickly added, stirred perfectly, and left for 30 minutes at room temperature (Muyassaroh et al., 2020). A total of 1 ml of sample solution is diluted to 10 ml (dilution 10 times). Then a stock solution of BSA (Bovine Serum Albumin) is made at 1000 ppm (40 mg BSA + 40 ml aquades). BSA standard curve standard solution concentration: 40; 80; 120; 160; 180; 200; 240; 280 ppm in a 10 ml measuring flask with 1 ml of standard solution; 2 ml; 3 ml; 4 ml; 4.5 ml; 5 ml; 6 ml; 7 ml, then each added with 0.4 ml biuret solution and aquades until the limit mark is then homogenized (Ghanny et al., 2022). The maximum wavelength is determined by measuring one of the BSA standard solutions in the 400-800 nm range and obtaining a maximum wavelength of 523 nm. Then, absorption measurements were made in the sample and BSA standard solutions using a UV-Vis spectrophotometer at the maximum wavelength.

2.5. Optimum Dose Test of Biocoagulant *Spirulina platensis* (Jar Test)

The dose of biocoagulant was set at 0.1% (0.1mg+100ml aquades). The optimum dose test uses jar test / Velp JLT 6 Flocculator F105A / 109 concerning SNI 19-6449-2005. 1 L of homogeneous raw water is put into eight beaker glasses. Initial parameters are first measured: turbidity, temperature, pH, and TSS. The concentration variations used consist of 5-5 ml/l, 10-5 ml/l, 10-10 ml/l, 10-15 ml/l, 20-10 ml/l, 20-15 ml/l, 20-20 ml/l, 20-25 ml/l. The injection process or concentration is done gradually to avoid discoloration factors of *Spirulina platensis*. In the first concentration injection, a rapid stirring of 130 rpm is carried out for 1 minute. Followed by a slow stirring of 60 rpm for 2 minutes and continued at 20 rpm for 2 minutes. Further precipitation for 5 minutes. Then, proceed with injecting the second concentration with the same stages. After that, measurements of the final parameters, temperature, pH, turbidity, and TSS were carried out to compare the changes that occurred so that the effectiveness of each optimum dose of *Spirulina platensis* biocoagulant was known.

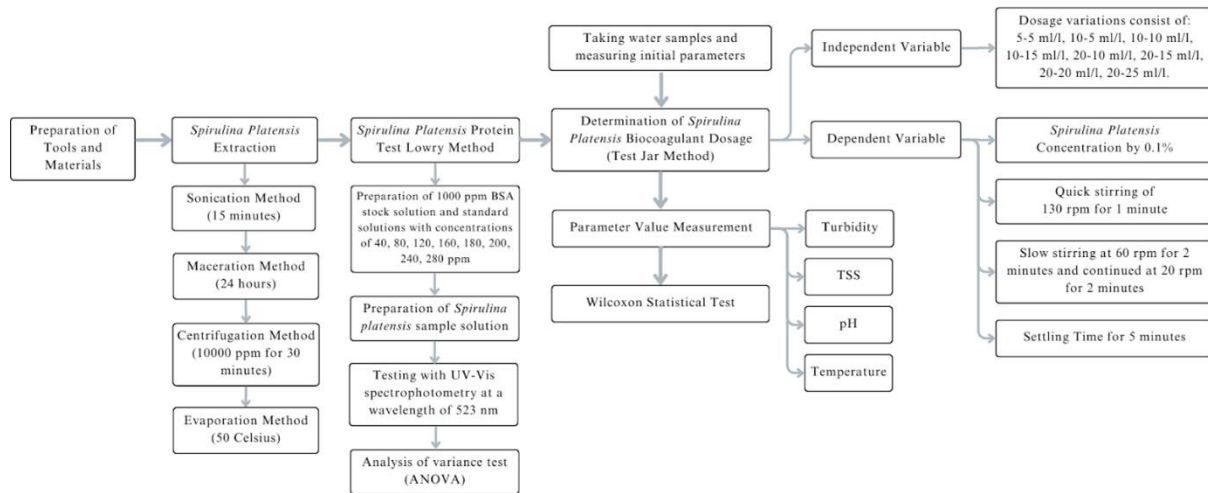


Figure 2. Research Flowchart

2.6. Data Analysis

The dose of biocoagulant was set at 0.1% (0.1mg+100ml aquades). Determination of protein concentration in *Spirulina platensis* was performed using a BSA standard curve incorporated into variance analysis (ANOVA) with a confidence level of 95% ($p < 0.05$). Furthermore, to determine the effectiveness of using the optimum dose of biocoagulant against reducing turbidity levels, TSS and pH hypotheses were determined: H_0 "There is no significant difference between before and after biocoagulant administration" and H_1 "There is a significant difference between before and after biocoagulant administration" analyzed using Wilcoxon's non-parametric test with H_0 rejected if p -value (sig.) < 0.05 .

3. Result and Discussion

3.1. Extraction of *Spirulina platensis*

The extraction process is carried out with a ratio of 1: 5 (20 gr of *Spirulina platensis* powder + 100 mL aquades), which will attract polar compounds contained in *Spirulina platensis*, one of which is protein. The sonication method for 15 minutes with the help of ultrasonic vibrations can generate significant energy to destroy the cell walls of *Spirulina platensis*, attracting bioactive compounds (Vernes et al., 2019) and shortening the extraction time. Next, maceration for 24 hours so that it is well extracted. The extracted results are fed into a cuvette and centrifuged at 10,000 rpm for 30 minutes to separate the mixture. Centrifugation with a speed of 10,000 rpm is can obtain maximum extraction results. If centrifugation is carried out at low speed, the results of the extracted active compounds are small. However, if the speed is too low, it can damage the protein structure. The extracted liquid is filtered and then evaporated with a rotary evaporator at a temperature of 50°C to obtain a viscous extract of 20 mL

This is done because 60-70°C heating can denature protein. Other studies also mention that proteins will experience denaturation when heated at temperatures around 80°C (Wang et al., 2020). The results of the viscous extract amounted to 2.95 gr (yield of 14.75% from *Spirulina platensis* powder). The yield results show the amount of extract produced from the extraction process with a good category if it is more than 10% (Subaryanti et al., 2022).

3.2. *Spirulina platensis* Protein Test Results

Table 1. Determination of maximum wavelength (nm)

Wavelength (nm)	Absorbance
463.00	0.169
493.00	0.181
523.00	0.192
553.00	0.171
583.00	0.132
613.00	0.087

The BSA standard curve determines the concentration of protein levels that connect the concentration and absorbance in the solution. Based on Table 1, the maximum wavelength in the 400-800 nm range is determined to be 523 nm. Absorption measurement using a UV-Vis spectrophotometer at a wavelength of 523 nm yields the BSA standard curve as follows.

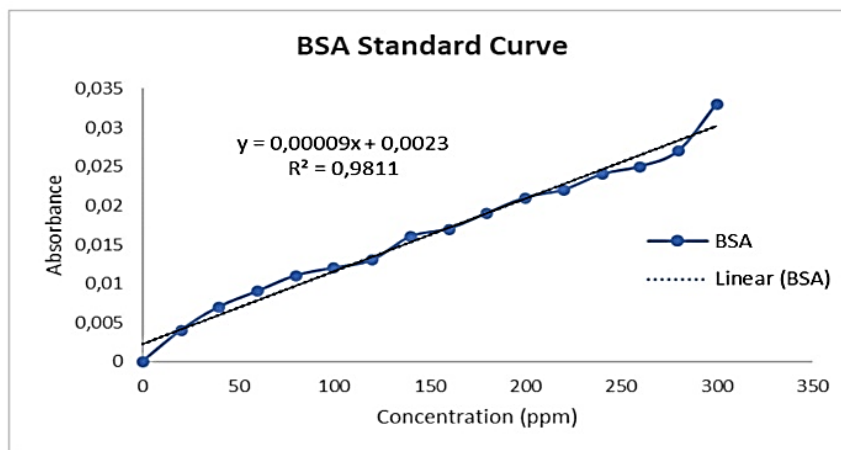


Figure 3. BSA standard curve

The results of the analysis are entered into a variance analysis (ANOVA) with a confidence level of 95% ($p < 0.05$) to find the relationship between the two variables to produce a linear regression equation. Based on the figure above, a linear regression equation is obtained from the BSA standard curve: $y = 0.00008x + 0.0037$, where x is the concentration and y is the absorbance. The correlation coefficient is 0.9959, close to 1, showing a good relationship between concentration and absorbance. The regression equation is used to determine the value of the protein concentration of *Spirulina platensis*. The absorbance for the sample of *Spirulina platensis* was 0.022, and the sample concentration was 228.75 µg/mL. The protein content in *Spirulina platensis* is 0.0114375% in 20 grams.

Spirulina platensis is considered a source of protein because it contains high protein, around 55-70%, with essential amino acids, such as lysine (2.6-4.63%), methionine (1.3-2.75%), tryptophan (1-1.95%), and cystine (0.5-0.7%). The protein content of microalgae is influenced by environmental conditions such as light intensity, nutrient limits (especially nitrogen), salinity, temperature, pH (Afifah et al., 2021), and culture age. The ability of *Spirulina platensis* as a biocoagulant to reduce turbidity values and Total

Suspended Solid (TSS) is influenced by the protein content with cationic amino acids in its constituent chains. Among the 20 types of amino acids that make up proteins, there are three types of cationic amino acids: lysine, histidine, and arginine (Silfia et al., 2023). The content of positively charged proteins that act as polyelectrolytes results in attractive forces with colloidal particles in negatively charged wastewater, and biocoagulants can bind colloidal particles and form a precipitated floc (Lisa et al., 2022). Increasing the *Spirulina platensis* concentration can increase protein levels (Koli et al., 2022). Therefore, *Spirulina platensis* has the potential to be used as a biocoagulant because it contains protein.

3.3. Test Result of the Optimal Biocoagulant Dose of *Spirulina platensis* (Jar Test)

The jar test method aims to determine the optimum dose of the biocoagulant *Spirulina platensis*. Improper doses cause colloids not to be bound optimally, and excessive doses can result in the restabilization of colloidal particles (Sibiya et al., 2021). Yogyakarta urban domestic wastewater serves as a test medium for the biocoagulant potential of *Spirulina platensis* against reducing TSS levels and turbidity. Based on initial parameter measurements, the domestic wastewater of the Yogyakarta WWTP has a slight turbid tendency in terms of physical parameters. Based on Table 2. found wastewater characteristics with high turbidity and TSS levels. The monthly report on wastewater measurement also supports exceeding wastewater quality standards at the Pialam WWTP Yogyakarta.

Table 2. Characteristics of the initial parameters of domestic wastewater

Parameter	Early Raw Water
Temperature (°C)	27°C
pH	7.2
Turbidity (NTU)	11.52 NTU
TSS (mg/L)	20 g/L

Turbidity Parameter Jar Test Results

The highest decrease in turbidity levels was at doses of 10-5 ml/L and 10-10 ml / L (Figure 4). The correct dose will cause destabilization of fine particles to produce attractive forces and form flocs. Hussain et al., (2019) state that maximum coagulant efficiency can occur when the optimum initial coagulant and turbidity dose is used. Excessive biocoagulant doses will produce dispersion from the surface charge of colloidal particles that turn so that biocoagulants are not optimal (Priyatharishini et al., 2019). Generally, a decrease in turbidity levels will affect the TSS value, but the two do not have a directly proportional relationship. This is influenced by the materials that cause water turbidity, which can consist of various materials with different properties and weights, so they are not really reflected in comparable TSS residue weights (Samudro and Rulian, 2011).

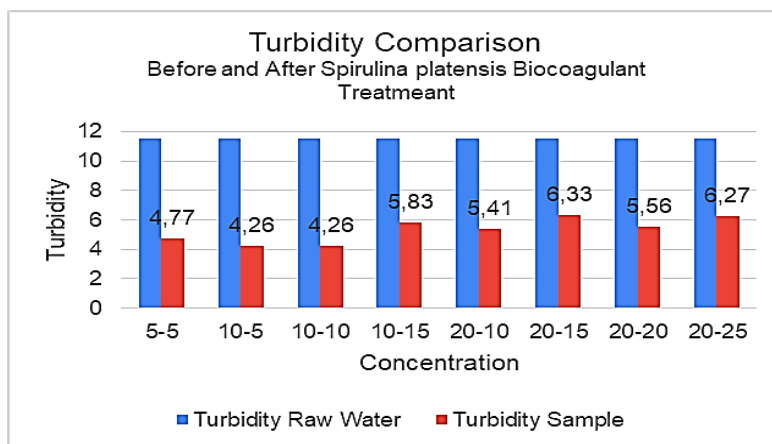


Figure 4. Comparison of turbidity before and after biocoagulant treatment of *Spirulina platensis*

TSS Parameter Jar Test Results

Based on Figure 5. the optimum dose is 10-10 ml / L injection with a TSS value of 3 mg/L. Giving biocoagulants into raw water causes attractive forces to attract bonds between colloidal harmful particles and cation particles from biocoagulants and produces flocs. One of the factors in the floc formation process is the fast mixing speed. Proper stirring causes the coagulant to be dispersed quickly and evenly in the liquid waste (Hadiwidodo et al., 2019). So, the potential for collisions between particles with the coagulant runs better. The specific gravity of suspended solids heavier than water's specific gravity causes gravitational precipitation. Adding a dose of biocoagulant *Spirulina platensis* will give a green color. In addition, giving an excessive dose will cause restabilization of the colloid particles, namely, the negative charge will change to positive due to the absorption of the excess dose, resulting in a repulsive force. In biocoagulant research with a mixture composition of 85 mg/l tamarind and 1 mg/l aluminum sulfate using river water samples with an initial turbidity content of 55 NTU, it was found that the optimum biocoagulant reduced to 3.18 NTU at a dose of 33 mg/l. In contrast, the addition of The dose experienced restabilization, marked by an increase in the turbidity value again (Afiatun et al., 2018). Then, in another study, optimal alum coagulant reduced turbidity from 40.2 NTU to 3.08 NTU with a dose of 40 ppm and increased again when the dose was increased (Sisnayati et al., 2021). This is because, at the optimum dose of 40 ppm, the alum content as a dispersion colloid, which has a positive value, will bind fine waste particles with a negative nature and then be neutralized until small flocs form settle. However, increasing the dose will cause the adsorption of excess cations on the surface of negatively charged colloidal particles with the opposite charge of Al_3^+ from aluminum sulfate.

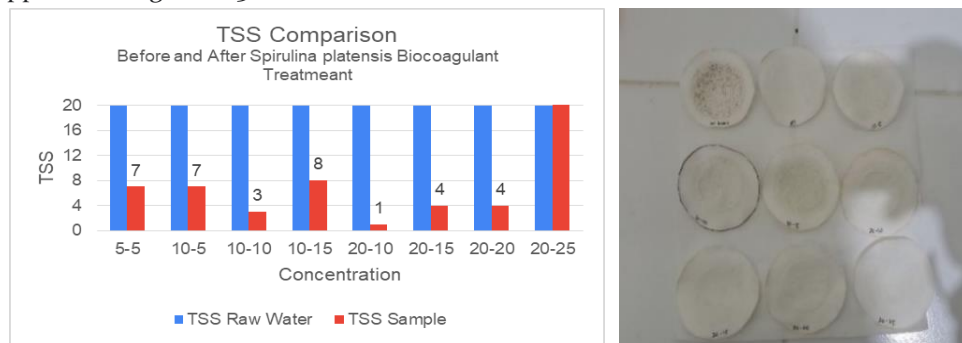


Figure 5. TSS comparison before and after biocoagulant treatment of *Spirulina platensis* (a); TSS result (b)

pH Parameter Jar Test Results

Based on Figure 6. the use of biocoagulants was found not to affect changes in the pH condition of the sample water. The characteristics of wastewater at a neutral pH can cause the coagulation process to be non-optimal. Based on research by Silva et al., (2021), wastewater with a pH between 5-7 has a lower turbidity reduction efficiency than alkaline pH due to the pH-sensitive nature of *Spirulina platensis*.

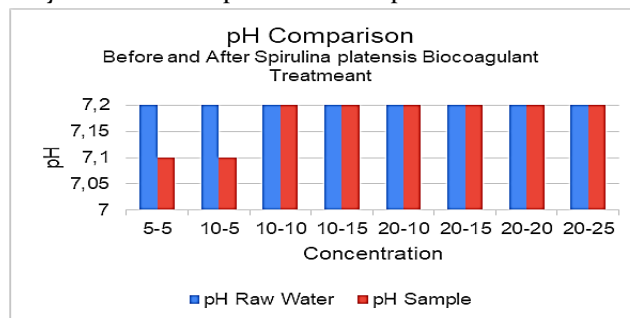


Figure 6. pH Comparison before and after biocoagulant treatment of *Spirulina platensis*

3.4. Effectiveness of the Biocoagulant *Spirulina platensis* Against TSS and Turbidity

The effectiveness of biocoagulant *Spirulina platensis* on all three parameters, the optimum dose is a dose of 10-10 ml/L with turbidity effectiveness of 63.02% and TSS of 85% (Figure 7). This is proven based on the Wilcoxon test (Table 3), resulting in significant changes between before and after administration of *Spirulina platensis* biocoagulant to turbidity parameters and TSS with p values (Asymp. Sig.) < 0.05. The pH parameter p-value (Asymp. Sig.) > 0.05 or no significant change between before and after administration of biocoagulant *Spirulina platensis*. There is a correlation between the decrease in TSS parameters and turbidity; the lower the content of suspended particles in a solution, the lower the turbidity level (Rahmawan et al., 2019). This is because suspended particles that do not dissolve and cannot immediately settle cause turbidity (Suhernomo et al., 2022)). In the pH parameter, there is a relationship between the type of biocoagulant and the pH of the wastewater used. pH parameter is one of the parameters that influences the coagulation-flocculation process. This is due to using protein, the primary active substance, as a coagulant. Protein characteristics have amphoteric molecular properties, so they depend on the pH of the solution (Fitriagustiani et al., 2022).

Table 3. Wilcoxon Test Results of the Effectiveness of Biocoagulant Dosing Against Parameter Reduction

Test Statistics			
	PostTest_pH - PreTest_pH	PostTest_Turbidity- PreTest_Turbidity	PostTest_TSS- PreTest_TSS
Z	.000 ^b	-2. 521 ^c	-2. 383 ^c
Asymp. Sig. (2- tailed)	1.000	.012	.017

a. Wilcoxon Signed Ranks Test
 b. The sum of negative ranks equals the sum of positive ranks
 c. Based on positive ranks

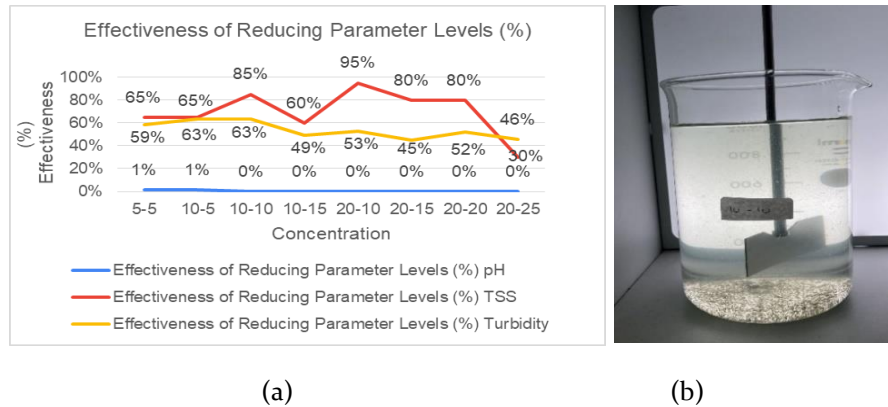


Figure 7. effectiveness of parameter reduction (%) (a); raw water condition from dosing 10-10 ml/L (b)

So, the optimum dose of *Spirulina platensis* biocoagulant based on pH, Turbidity, and TSS parameters is 10-10 ml / L. Excessive doses will cause colloidal particles to restabilize (Ejimofor et al., 2021). Restabilization will impact the reversal of colloidal particles from negative to positive due to the absorption of excess doses so that larger floc does not form.

3.5. SWOT Analysis of Biocoagulant Potential of *Spirulina platensis* to the Environment

In general, SWOT analysis can be interpreted as a technique that can be used to evaluate Strengths, Weaknesses, Opportunities, and Threats. SWOT analysis is considered a primary analysis method that assesses a topic or problem from 4 different sides, which can then ultimately help in

formulating recommendations to maintain strength to increase the advantage of existing opportunities and reduce shortcomings to avoid threats (Anissa et al., 2019). In this section, SWOT analysis is carried out to determine the strengths, weaknesses, opportunities, and threats to the use of *Spirulina platensis* as a biocoagulant in reducing turbidity and TSS levels in domestic wastewater to provide optimal strategies by maximizing existing strengths and opportunities and minimizing existing weaknesses and threats simultaneously. In this section, SWOT analysis is carried out by identifying internal and external factors based on test results and interviews with several experts. The alternative development strategy for using *Spirulina platensis* as a biocoagulant (Table 4).

Table 4. SWOT Analysis of biocoagulant potential of *Spirulina Platensis* to the environment

Internal Factor	Strength	Weakness
	External Factor	<ol style="list-style-type: none"> 1. The use of <i>Spirulina platensis</i> as a Biocoagulant does not damage or pollute the environment 2. <i>Spirulina platensis</i> grows and multiplies very quickly 3. No effect on water salinity levels
Opportunities	S – O Strategy	W – O Strategy
<ol style="list-style-type: none"> 1. Increasing industry awareness in environmentally friendly waste management 2. <i>Spirulina platensis</i>, is relatively faster to reproduce than other types of microalgae, so its cultivation is relatively easier 3. The development of technology and information of <i>Spirulina platensis</i> as an environmentally friendly biocoagulant 	<ol style="list-style-type: none"> 1. The use of biocoagulants by industry to reduce the potential impact of waste and the application of environmentally friendly waste management (S₁, O₁) 2. Utilization of technology as a basis for effective cultivation of <i>Spirulina platensis</i> and to avoid the presence of invasive plants that interfere (S₂, O₂, O₃) 	<ol style="list-style-type: none"> 1. Implement cultivation of <i>Spirulina platensis</i> in wastewater systems to reduce production costs in large quantities (W₁, O₁, O₂) 2. Conduct research and testing related to the optimum dose of <i>Spirulina platensis</i> as a biocoagulant (W₂, W₃, O₃)
Threats	S – T Strategy	W – T Strategy
<ol style="list-style-type: none"> 1. The use of synthetic coagulants is cheaper and more practical 2. The emergence of secondary pollution due to the use of biocoagulant <i>Spirulina platensis</i> in inappropriate doses 3. Biodiversity threats due to the expansion of <i>Spirulina platensis</i> cultivation land if the demand for biocoagulant production is higher 	<ol style="list-style-type: none"> 1. Making <i>Spirulina platensis</i> cultivation itself in larger quantities to reduce costs incurred (S₂, T₁) 2. Trials were conducted to find the correct dose of <i>Spirulina platensis</i> biocoagulant (S₁, T₂) 3. Expansion of <i>Spirulina platensis</i> cultivation land in freshwater and seawater types because the content in <i>Spirulina platensis</i> does not affect water salinity (S₃, T₃) 	<ol style="list-style-type: none"> 1. Optimizing the use of <i>Spirulina platensis</i> biocoagulant with optimal doses to reduce large amounts of costs (W₁, W₂, W₃, T₁, T₂) 2. Build zoning of cultivation suitability areas (W₁, T₃)

4. Conclusions

Spirulina platensis has the potential to be a biocoagulant with a protein content of 0.0114375% in 20 gr. With this protein content, as much as 0.1% biocoagulant *Spirulina platensis* can reduce turbidity and TSS levels of domestic wastewater with an optimum dose of 10-10 ml (in 2 injections) with an effectiveness value of reducing turbidity levels by 63.02% and an effectiveness value of reducing TSS by 85%. Based on the Wilcoxon test, it was also found that the P-value < 0.05, which means there is a significant difference in TSS value and turbidity between the results before and after the *Spirulina platensis* biocoagulant treatment. In contrast, the pH parameter found that the P-value > 0.05, meaning there is no significant change before or after the administration of *Spirulina platensis* biocoagulant.

Acknowledgement

Thanks to the Directorate General of Higher Education, Research, and Technology for funding Student Creativity Program Activities so that this research can occur. We would also like to thank the IPAL Pialam Yogyakarta for cooperating in providing domestic wastewater samples. We want to thank all WWTP officers of Balai Pialam Yogyakarta, all officers of the Toya Wening Drinking Water Perumda Laboratory of Surakarta City, and the UPT UNS Laboratory who have provided support and facilitated all the the author needs to run the research.

References

- Afiatun, E., Wahyuni, S. and Hamdan F. 2018. Perbandingan Komposisi Koagulan Biji Kelor (*Moringa Oleifera*), Biji Asam Jawa (*Tamarindus Indica L*) dan Aluminium Sulfat ($Al_2(SO_4)_3$) Untuk Menurunkan Kekeruhan Air Sungai Citarum Atas Ciparay Kabupaten Bandung. *Journal of Community Based Environmental Engineering and Management* 2(1), 21-30.
- Affah, A.S., Prajati, G., Adicita, Y. and Darwin. 2021. Variasi penambahan nutrisi (NPK cair) dalam kultivasi mikroalga *Chlorella Sp.* *Journal of Natural Resources and Environmental Management* 11(1), 101-107.
- Agustina, S., Aidha, N. N. and Oktarina. 2018. Ekstraksi antioksidan *Spirulina platensis* dengan menggunakan metode ultrasonikasi dan aplikasinya untuk krim kosmetik. *Jurnal Kimia dan Kemasan* 40(2), 105-116.
- Anissa, A., Anggraini, S. M. Putri, and Putra, Y. A.. 2019. Analisis kelayakan bisnis usaha Bio Solid Rubber (BSR) sebagai pengental getah karet. *Journal of Agribusiness Sciences* 2(2), 47 – 52.
- Dirgawati, M., Sururi, M. R. and Suhendar, D. Y. 2023. Determination of strategy planning of domestic waste water management system in a commercial area of tasikmalaya city. *Jurnal Presipitasi* 20(2), 280– 294.
- Ejimofor, M.I., Ezemagu, L. G. and Menkiti, M. C. 2021. RSM and ANN-GA modeling of colloidal particles removal from paint wastewater via coagulation method using modified Aguleri montmorillonite clay. *Current Research in Green and Sustainable Chemistry* 4, 1-12.
- Fachri, B. A., Palupi, B., Rahmawati, I., Rizkiana, M. F. and Amini, H. W. 2022. Ekstraksi protein dari *Spirulina sp* dalam pelarut etanol terbantuan gelombang ultrasonik. *Jurnal Penelitian Sains dan Teknologi Indonesia* 1(1), 73-81.
- Fayyad, R. J., Ali, A. N. M., Dwaish, A. S. and Al- Aboodi, A. K. A. 2019. Anticancer activity of *Spirulina platensis* methanolic extracts against L20B and MCF7 human cancer cell lines. *Plant Archives* 19(1), 1420-1426.
- Fitriagustiani., Mustopa, A. Z., Budiarti, S., Warsito, M. F., Pratiwi, R. D., Agustiyani, D. F. and Nurfatwa, M. 2022. Formulation and characterization of alginate coated chitosan nanoparticles as therapeutic protein for oral delivery system. *Trends in Sciences* 19(18), 1-11.
- Hadiwidodo, M., Ainurrofiq, M. N., Purwono, and Oktiawan, W. 2019. Penggunaan nano-bio koagulan dari cangkang keong sawah (*Pila ampullacea*) untuk menurunkan COD, kekeruhan, dan TSS limbah cair Industri Farmasi. *Jurnal Presipitasi* 16(3): 133-139.

- Hu G., Bakhtavar, E., Hewage, K., Mohseni, M. and Sadiq, R. 2019. Heavy metals risk assessment in drinking water: An integrated probabilistic-fuzzy approach. *Journal of Environmental Management* 250, 1-13.
- Hussain, S., Ghouri, A. S., and Ahmad, A. 2019. Pine cone extract as natural coagulant for purification of turbid water. *Heliyon* 5, 2-12.
- Islam, M.R. and Mostafa, M. G. 2020. Characterization of textile dyeing effluent and its treatment using polyaluminum chloride. *Appl Water Sci.* 10 (119), 1-10.
- Kholif, M. A. 2020. *Pengelolaan air limbah domestik*. Scofindo Media Pustaka: Surabaya
- Koli, D.K., Rudra, S.G., Bhowmik, A. and Pabbi, S. 2022. Nutritional, functional, textural and sensory evaluation of *Spirulina* enriched green pasta: A potential dietary and health supplement. *Foods* 11(7), 979.
- Konur, O. 2020. *Algal Science, Technology and Medicine*. Imprint: Academic Press.
- Lestari, I., Anggorowati, H. and Hadi, F. 2021. Efek pretreatment ultrasonikasi terhadap hidrolisis enzimatis *Spirulina platensis* residue. *Eksergi* 18(1), 24-28.
- Lisa, D., Fikri E., and Rojali, R. 2022. Penggunaan koagulan kombinasi bubuk biji Moringa oleifera dan bubuk biji *Tamarindus indica* dalam menurunkan kadar COD dan TSS limbah cair tahu. *Jurnal Kesehatan Lingkungan Indonesia* 21(3), 266-273.
- Muyassaroh, R. K., Dewi, and Minah, F. N. 2020. Penentuan kadar protein pada *Spirulina platensis* menggunakan metode lowry dan kjeldah. *Jurnal Teknik Kimia UPN Veteran Jatim* 15(1), 40-45.
- Nurhidayati, N., Ardiatma, D. and Tasdik, J. 2021. Treatment of domestic wastewater with combination of phytoremediation and filtration using activated carbon of tea dregs. *Journal Presipitasi.* 18(3), 386-399.
- Owodunni, A. A. and Ismail, S. 2021. Revolutionary technique for sustainable plant-based green coagulants in industrial wastewater treatment. *Journal of Water Process Engineering* 42, 1-21.
- Shabiya, P., Rathilal, N. S. and Kweiyor, T. E. 2021. Coagulation treatment of wastewater: kinetics and natural coagulant evaluation. *Molecules* 26(3), 698.
- Sisnayati, E. Winoto, Yhopie, and Apriliyanti, S. 2021. Perbandingan penggunaan tawas dan pac terhadap kekeruhan dan ph air baku pdam tirta musi palembang. *Jurnal Redoks* 6(2), 107-116.
- Priyatharishini, N. M., Mokhtar, M. and Kristanti, R. A. 2019. Study on the effectiveness of banana peel coagulant in turbidity reduction of synthetic wastewater. *International Journal of Engineering Technology and Science.* 6(1), 82-90.
- Purba, N. E., Suhendra, L. and Wartini, N. M. 2019. Pengaruh suhu dan lama ekstraksi dengan cara maserasi terhadap karakteristik pewarna dari ekstrak alga merah (*Gracilaria* sp.) *Jurnal Rekayasa dan Manajemen Agroindustri* 7(4), 488-498.
- Rahmawan, A. J., Effendi, H. and Suprihatin. 2019. Potensi rumput vetiver (*Chrysopogon zizanioides* L.) dan kangkung (*Ipomoea aquatica* Forsk.) sebagai agen fitoremediasi limbah industri kayu. *Journal of Natural Resources and Environmental Management* 9(4), 904-919.
- Samudro, G. and Rulian, R. A. Studi penurunan kekeruhan dan total suspended solids (tss) dalam bak penampung air hujan (pah) menggunakan reaktor gravity roughing filter (grf). *Jurnal Presipitasi* 8(1), 1-17.
- Sattuang, H., Mustari, K. and Syahrul, M. 2020. Analisis efektivitas instalasi pengolahan air limbah domestik studi kasus Batikite Resort Jenepono. *Jurnal Ecosolum* 9(1), 56-68.
- Sharma, S. K. 2023. *Green Chemistry, its Role in Achieving Sustainable Development Goals*. CRC Press: India.
- Silfia, W., Amalia, L. and Ardiana, C. 2023. Perbandingan kemampuan koagulasi empat macam biji polong-polongan (famili Fabaceae). *Jurnal Life Science: Jurnal Pendidikan dan Ilmu Pengetahuan Alam* 5(1), 9-17.

- Silva D. F. S, Speranza, L. G., Quartaroli, L., Moruzzi, R. B. and Silva, G. H. R. 2021. Separation of microalgae cultivated in anaerobically digested black water using Moringa Oleifera Lam seeds as coagulant. *Journal of Water Process Engineering* 39, 2-9.
- Subaryanti., Meianti, D. Y. D. and R. T. Manalu. 2022. Potensi antimikroba ekstrak etanol daun gatal (*Urticastrum decumanum* (Roxb.) Kuntze) terhadap pertumbuhan *Staphylococcus aureus* dan *Candida albicans*. *Jurnal Ilmu Kefarmasian* 15(2), 93-102.
- Suhermono, S., Fatah, L., Saidy, R. A. and Pratmadi, B. J. 2022. Laboratory simulation for reducing water turbidity by water hyacinth to meet coal wastewater discharge in Paringin Pit Lake. *Technium: Romanian Journal of Applied Sciences and Technology* 4(5), 1-7.
- Tariq, A. and Mushtaq, A. 2023. Untreated wastewater reasons and causes: a review of most affected areas and cities. *International Journal of Chemical and Biochemical Sciences* 23(1), 121-143.
- Vernes, L., Abert-Vian, M., El Maataoui, M., Tao, Y., Bornard, I. and F. Chemat. 2019. Application of ultrasound for green extraction of proteins from spirulina. Mechanism, optimization, modeling, and industrial prospects. *Ultrasonic Sonochemistry* 54, 1-25.
- Wang, S., Lin, R., Cheng, S. and Tan, M. 2020. Water dynamics changes and protein denaturation in surf clam evaluated by two-dimensional LF-NMR T₁-T₂ relaxation technique during heating process. *Food Chemistry* 320, 1-8.
- Zhang, L., Liu, X., Zhang, M., Wang, T., Tang, H. and Jia, Y. 2023. The effect of pH/PAC on the coagulation of anionic surfactant wastewater generated in the cosmetic production. *Journal of Environmental Chemical Engineering* 11, 1-8.